

Temperature Compensated Crystal Oscillators (TCXO) Surface Mount Type TCXO (LSI Type) KT3225 Series



3.2×2.5mm



RoHS Compliant

Features

- Miniature SMD type (3.2×2.5×1.0mm)
- Reflow compatible
- AFC function available
- 2.3 to 3.9V drive available
- Freq. temp. characteristics: $\pm 2.0 \times 10^{-6}$ / -30 to +85°C

Applications

- 3G (CDMA, W-CDMA, TD-SCDMA), GPRS, GSM, W-LAN, WiMAX
- Low power radio communications

How to Order

KT3225P 26000 D C W 28 T xx
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series

② Output Frequency

③ Freq. Temp. Chrst.

B $\pm 1.0 \times 10^{-6}$

C $\pm 1.5 \times 10^{-6}$

D $\pm 2.0 \times 10^{-6}$

④ Lower Operating Temp.

C -30°C

E -20°C

G -10°C

⑤ Upper Operating Temp.

W +85°C

V +80°C

U +75°C

⑥ Supply Voltage

28 2.8V 30 3.0V

⑦ Voltage Control Range

T TCXO

Other* VCTCXO

* Customer Spec.

⑧ Option Code

Packaging (Tape & Reel 3000 pcs./ reel)


Specifications

Item	Symbol	Conditions	Min.	Max.	Units
Output Frequency Range	fo	Standard Frequency: 13, 19.2, 26, 38.4, 40, 52	13	52	MHz
Frequency Tolerance	f _{tol}	vs Temperature	-2	+2	$\times 10^{-6}$
		vs Load	-0.1	+0.1	
		vs Voltage	-0.2	+0.2	
Frequency Aging	f _{age}	Per Year	-1	+1	$\times 10^{-6}$
Storage Temperature Range	T _{stg}		-40	+85	°C
Operating Temperature Range	T _{use}		-30	+85	°C
Voltage Control Range	f _{cont}	Positive	±8	±15	$\times 10^{-6}$
Supply Voltage	V _{CC}		2.3	3.9	V
Output Level	V _{pp}	Clipped Sine*, Load: 10k ohm // 10pF	0.8	—	Vp-p
Current Consumption	I _{CC}		—	2	mA
Harmonics	—		—	-5	dBc


* : A DC-cut capacitor is not embedded in this crystal oscillator. Connect a DC-cut capacitor (≥ 1 nF) to the line-out terminal of the oscillator.

Dimensions

(Unit: mm)

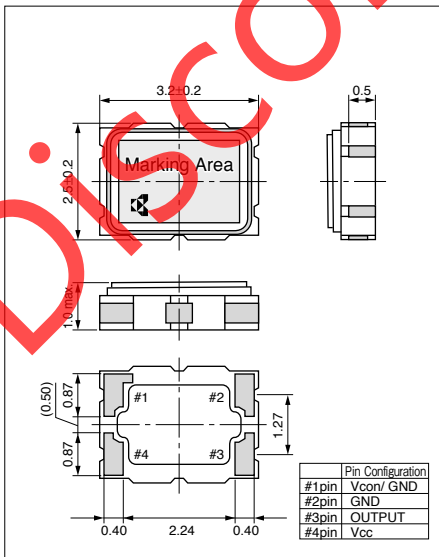

Test Circuit

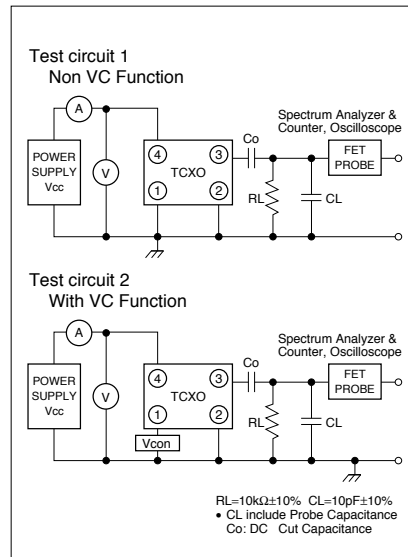

Recommended Land Pattern

(Unit: mm)

