



LV-PECL/ 3.3V/ 5.0×3.2mm



RoHS Compliant

**Features**

- Miniature ceramic package
- LV-PECL output
- High frequency to 170MHz
- Low Phase Noise

Table 1

Code	Freq. Tol. × 10 <sup>-6</sup>	Operating Temperature Range (°C)	Note
0	±50	-10 to +70	Standard specifications
S	±30	-10 to +70	Please contact us for available frequencies.
G	±50	-40 to +85	

**How to Order**

KV5032D 155.520 P 3 □ J 00  
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series
- ②Output Frequency
- ③Output Type (LV-PECL)
- ④Supply Voltage (3.3V)
- ⑤Frequency Tolerance (See Table 1)
- ⑥Symmetry/ INH Function/ APR (45/ 55%, Disable, APR50)
- ⑦Individual Specification (STD Specification is "00".)

Packaging (Tape & Reel 1000 pcs./ reel)


**Specifications**

Item	Symbol	Conditions	Min.	Max.	Unit	
Output Frequency Range <sup>Note1</sup>	fo		80	170	MHz	
Frequency Tolerance <sup>Note2</sup>	f <sub>tol</sub>	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Shock and vibration	Temp.: -10 to +70°C / -40 to +85°C	-50	+50	× 10 <sup>-6</sup>
			Temp.: -10 to +70°C	-30	+30	
Absolute Pull Range	APR	Standard Specifications Extend (Option)	±50 ±100	—	× 10 <sup>-6</sup>	
Frequency Aging	f <sub>age</sub>	Per 20years @25°C	-15	+15	× 10 <sup>-6</sup>	
Control Voltage	V <sub>c</sub>		0	+3.3	V	
Storage Temperature Range	T <sub>stg</sub>		-55	+125	°C	
Operating Temperature Range	T <sub>use</sub>	Standard Specifications	0	+70	°C	
		Extend (Option)	-40	+85		
Max. Supply Voltage	—		-0.3	+5.0	V	
Supply Voltage	V <sub>cc</sub>		+2.97	+3.63	V	
Current Consumption	I <sub>cc</sub>		—	85	mA	
Disable Current	I <sub>dis</sub>		—	5	mA	
Symmetry	SYM	50ohm@crossing point	45	55	%	
Rise/ Fall Time (20% to 80% Output Level)	Tr/ Tf	50ohm	—	0.7	ns	
Low Level Output Voltage <sup>Note3</sup>	V <sub>OL</sub>		—	V <sub>cc</sub> -1.620	V	
High Level Output Voltage <sup>Note3</sup>	V <sub>OH</sub>		V <sub>cc</sub> -1.025	—	V	
Output Load	—	LV-PECL Output	—	50	ohm	
Input Voltage Range	V <sub>IN</sub>		0	+3.3	V	
Low Level Input Voltage <sup>Note3</sup>	V <sub>IL</sub>		—	30% V <sub>cc</sub>	V	
High Level Input Voltage <sup>Note3</sup>	V <sub>IH</sub>		70% V <sub>cc</sub>	—	V	
Input Resistance	—		10	—	Mohm	
Disable Time	t <sub>dis</sub>		—	200	ns	
Enable Time	t <sub>ena</sub>		—	2	ms	
Start-up Time	t <sub>str</sub>	@Minimum operating voltage to be 0 sec.	—	10	ms	
Phase Jitter	J <sub>Phase</sub>	@122.88MHz	BW : 12kHz to 20MHz	—	0.3	ps
			@10Hz offset	Typ. -71		
Phase Noise	—	@122.88MHz	@100Hz offset	Typ. -102	dBc/ Hz	
			@1kHz offset	Typ. -128		
			@10kHz offset	Typ. -146		
			@100kHz offset	Typ. -152		
			@1MHz offset	Typ. -156		
			@10MHz offset	Typ. -157		

Note : All electrical characteristics are defined at the maximum load and operating temperature range.  
Note1: Please contact us for inquiry about operating temperature range, available frequencies and other conditions.  
Note2: Please contact us for the Frequency tolerance of -40 to +85°C.  
Note3: DC characteristic

**Dimensions**

(Unit: mm)

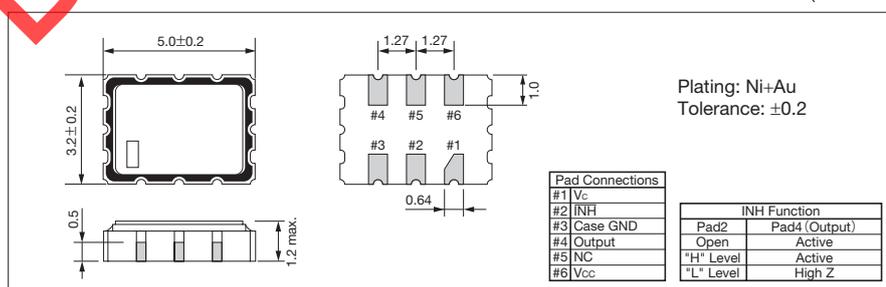

**Recommended Land Pattern**

(Unit: mm)

