
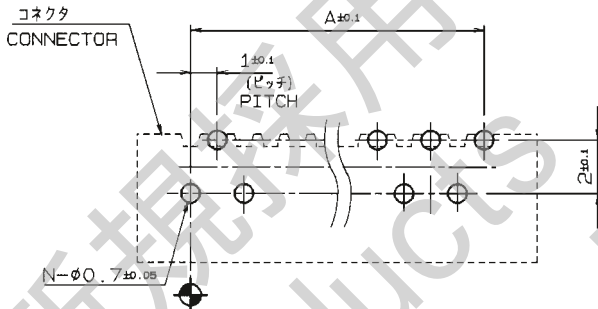



1.0mm Pitch  
SERIES

# 6228

1.0mmピッチ NON-ZIF RA DIP 上接点  
1.0mmPitch LIF RA Through hole Top contact

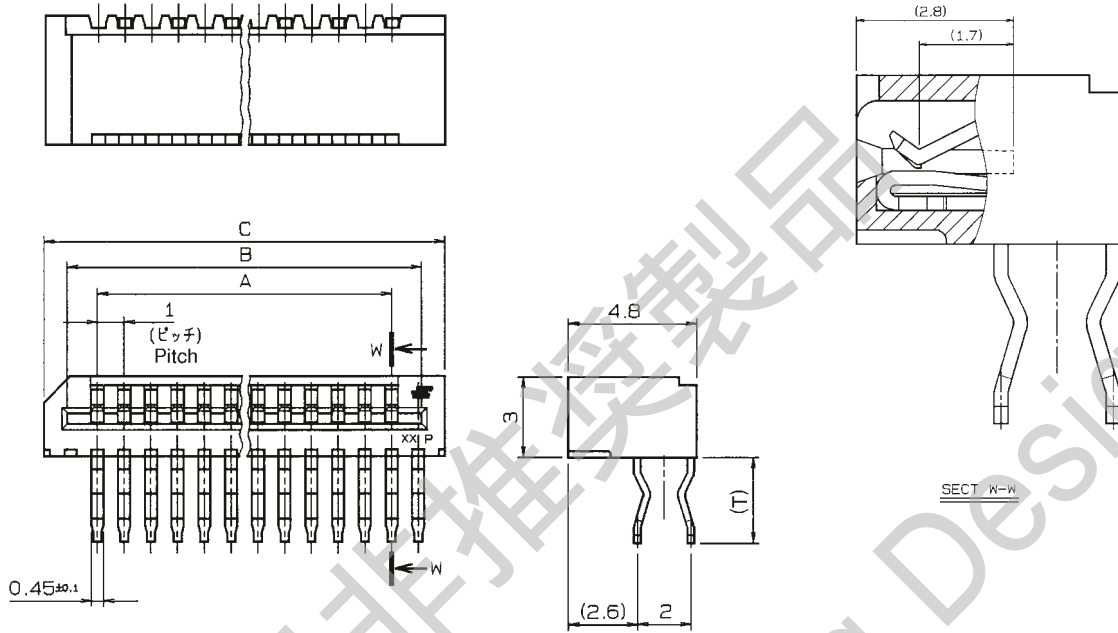

基板取付寸法 (コネクタ搭載側)  
MOUNTING LAYOUT  
(t=1.6 mm)

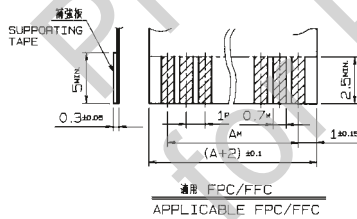

| 種類<br>KIND | 公差 TOLERANCE |               |       |
|------------|--------------|---------------|-------|
|            | P            | W             | M     |
| FPC        | ±0.02        | +0.1<br>-0.05 | ±0.05 |
| FFC        | ±0.05        | ±0.03         | ±0.1  |

| 極数<br>NO. OF<br>POS | 型番<br>ASSEMBLY NUMBER | A    | B     | C  |
|---------------------|-----------------------|------|-------|----|
| 3                   | 00 6228 003 2XX 800+  | 2.0  | 4.06  | 6  |
| 4                   | ↑ 004 ↑               | 3.0  | 5.06  | 7  |
| 5                   | 005                   | 4.0  | 6.06  | 8  |
| 6                   | 006                   | 5.0  | 7.06  | 9  |
| 7                   | 007                   | 6.0  | 8.06  | 10 |
| 8                   | 008                   | 7.0  | 9.06  | 11 |
| 9                   | 009                   | 8.0  | 10.06 | 12 |
| 10                  | 010                   | 9.0  | 11.06 | 13 |
| 11                  | 011                   | 10.0 | 12.06 | 14 |
| 12                  | 012                   | 11.0 | 13.06 | 15 |
| 13                  | 013                   | 12.0 | 14.06 | 16 |
| 14                  | 014                   | 13.0 | 15.06 | 17 |
| 15                  | 015                   | 14.0 | 16.06 | 18 |
| 16                  | 016                   | 15.0 | 17.06 | 19 |
| 17                  | 017                   | 16.0 | 18.06 | 20 |
| 18                  | 018                   | 17.0 | 19.06 | 21 |
| 19                  | 019                   | 18.0 | 20.06 | 22 |
| 20                  | 020                   | 19.0 | 21.06 | 23 |
| 21                  | 021                   | 20.0 | 22.06 | 24 |
| 22                  | 022                   | 21.0 | 23.06 | 25 |
| 23                  | 023                   | 22.0 | 24.06 | 26 |
| 24                  | 024                   | 23.0 | 25.06 | 27 |
| 25                  | 025                   | 24.0 | 26.06 | 28 |
| 26                  | 026                   | 25.0 | 27.06 | 29 |
| 27                  | 027                   | 26.0 | 28.06 | 30 |
| 28                  | 028                   | 27.0 | 29.06 | 31 |
| 29                  | ↓ 029 ↓               | 28.0 | 30.06 | 32 |
| 30                  | 00 6228 030 2XX 800+  | 29.0 | 31.06 | 33 |

注文コード ORDERING CODE

00 6228 0XX 2XX 800+

00 : トレー梱包  
TRAY PACKAGE

極数  
NUMBER OF  
POSITIONS

0 : キンクなし Without Kink  
1 : キンク付 With Kink

0 : T=3.2mm (テール長 Tail length)  
2 : T=2.5mm (テール長 Tail length)

RoHS 対応品

RoHS Compliant Product

生産対応可能極数については、営業部にご確認願います。

Feel free to contact our sales department for available numbers of positions.