

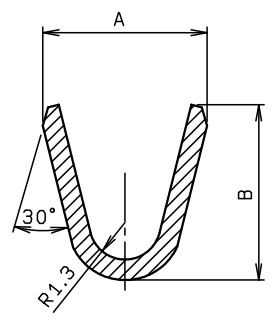


© 2019 KYOCERA Corporation

製品規格EJS-102

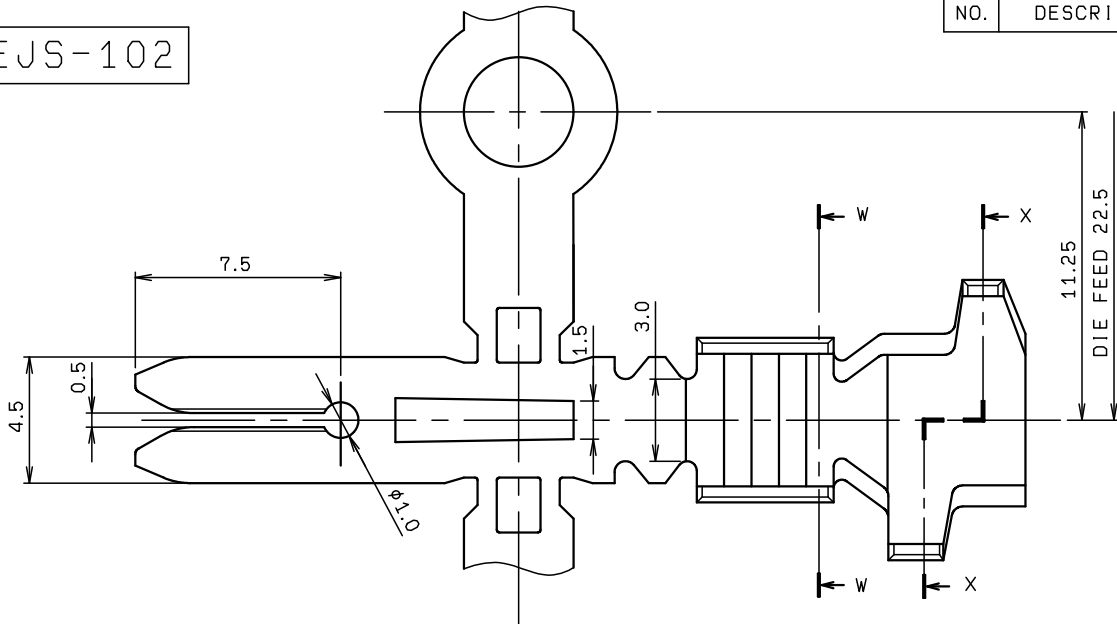

SECT. W-W

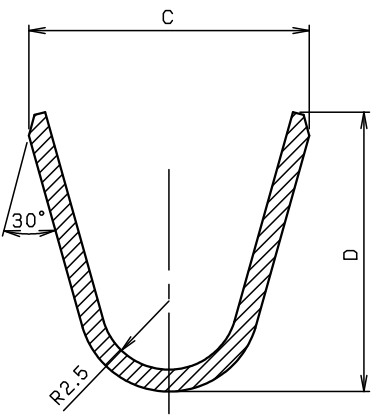

SECT. X-X

型番	A	B	C	D	適用電線	被覆外形
(1) 60 5090 0220 99 808 +	5.0	4.4	9.0	8.0	AWG#18~#14	5.08
(2) 60 5090 0210 99 808 +	6.0	6.4	10.2	10.2	AWG#12~#10	5.6

注記
NOTE

- 材質
MATERIAL
銅合金, t=0.8
COPPER ALLOY
- めっき
PLATING
Sn REFLOW:TIN PLATING 0.8μmMIN.

型番
P/N 60 5090 02X0 99 808 +
+ :Pb-free

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格							
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3				A	DCN19622	2019/10/15	K. MIYAMOTO		M. YOSHIDA
		UNIT		O	EDN-960	2005/07/21	M. YOSHIDA	Y. SHIROYAMA	N. HAYASHI
		mm		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		ANGLE		PART NAME / 品名					
ANGLE / 角度		SCALE		DATE		SERIES 5090 CONTACT			
±3°		5 : 1		2005/07/21		POWER CONNECTOR			
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番					
T. KOMATSU	M. YOSHIDA	Y. SHIROYAMA	N. HAYASHI	60 5090 02X0 99 808 +					
				DWG NO. / 図番				SHEET/REV	
				BJS 5090503				1/1 A	

