
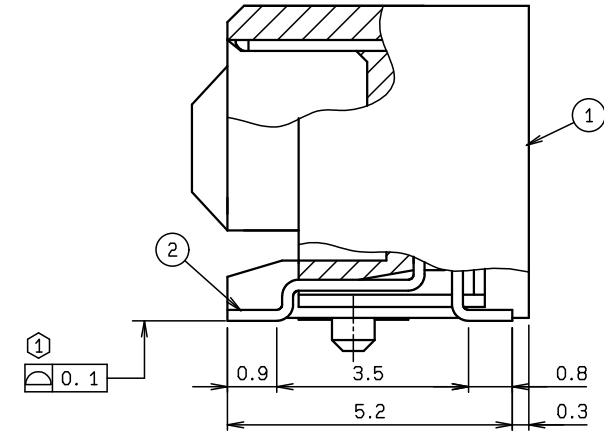

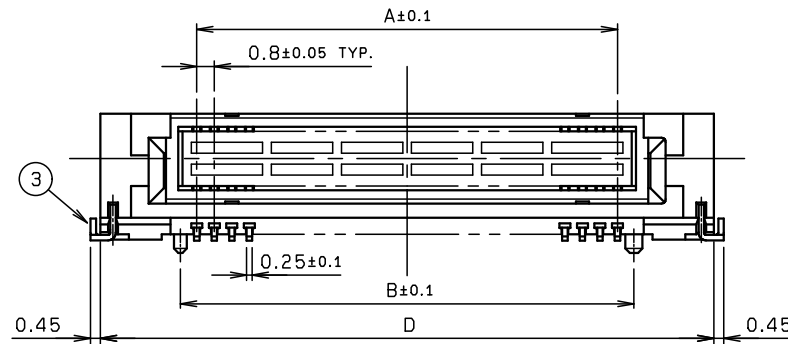


NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		UL94V-0 COLOR :BLACK
2	CONTACT		N	PHOS-BRONZE		AU CONTACT AREA Sn-Cu:TAIL AREA
3	ANCHOR PLATE		2	COPPER ALLOY		Sn-Cu

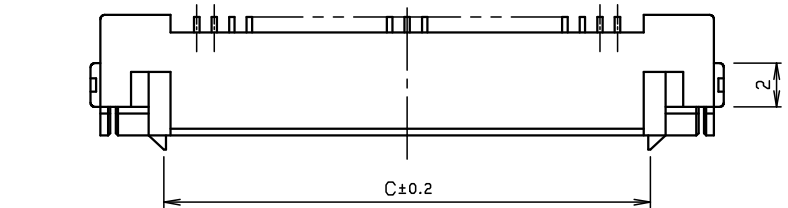


極数 NO. OF POS.	A	B	C	D
30	11.2	12.7	14.3	20.0
40	15.2	16.7	18.3	24.0

※この表は1ページ目へのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-1 ONLY.

注 記
NOTE

① テール底面及び固定金具の相互のバラツキは 0.1MAX.
COPLANARITY OF CONTACT TAILS AND ANCHOR PLATE
SHALL BE 0.1MAX.



※この注記は1ページ目へのみ適用
※THIS NOTES IS APPLICABLE TO
SHEET-1 ONLY.

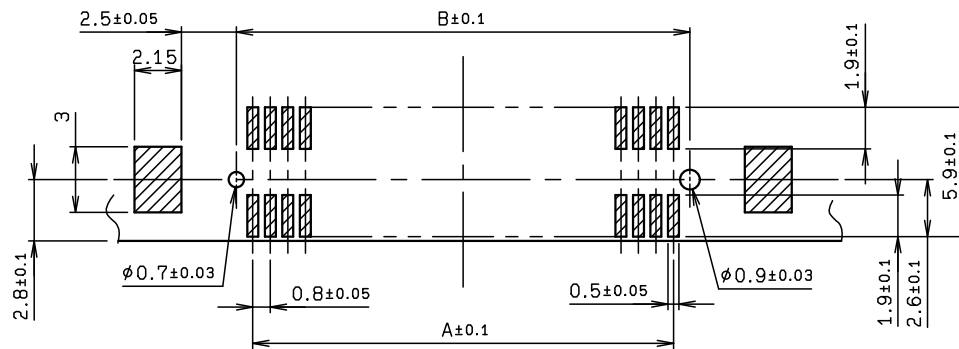


基板取付寸法
MOUNTING LAYOUT

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		B	DCN20818	2020/08/31	H. TAMAI		M. YOSHIDA
X < 10 ±0.2				A	DCN19603	2019/07/05	H. TAMAI		M. YOSHIDA
10 ≤ X < 30 ±0.25		UNIT	ANGLE	O	EDN-026	2004/01/13	C. YAMATO		K. ONO
30 ≤ X ±0.3		mm	3RD	NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE	DATE	PART NAME / 品名					
		NTS	2004/01/13	SERIES 5600 PLUG ASSY RA SMT SMALL ANCHOR PLATE TYPE					
DRAWN T. KOMATSU	DESIGNED C. YAMATO	CHECKED	APPROVED K. ONO	PART NO. / 製番					
				14 5600 0XX 200 883 M +					
KYOCERA				DWG NO. / 図番				SHEET/REV	
				BJS 5600031				1/2 B	

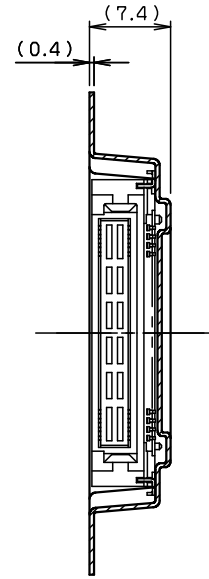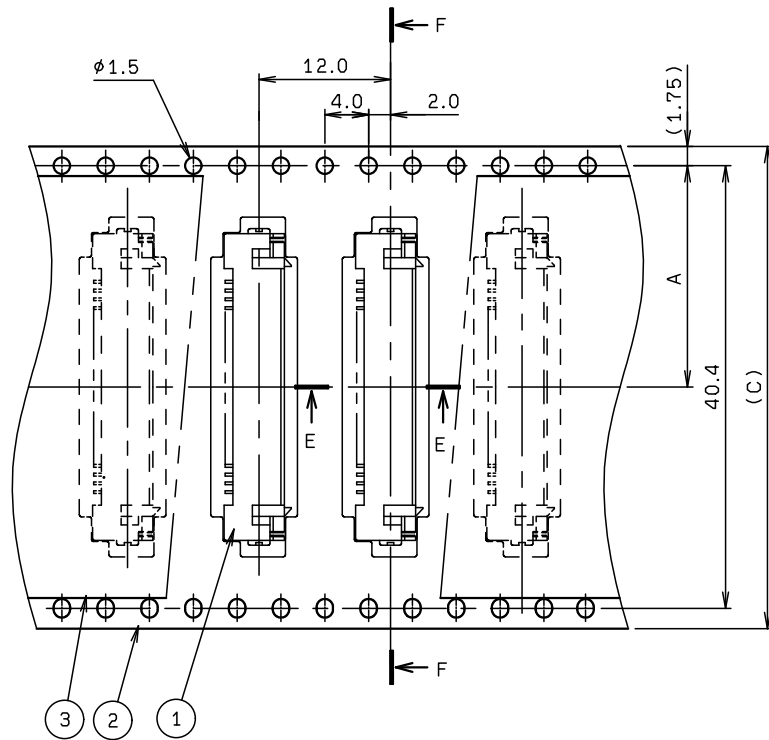


SECT. F-F

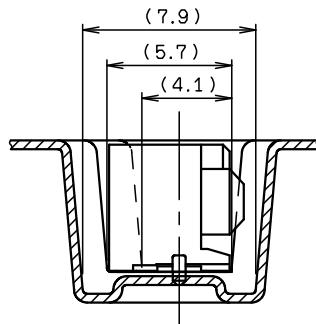

SECT. E-E (S=4:1)

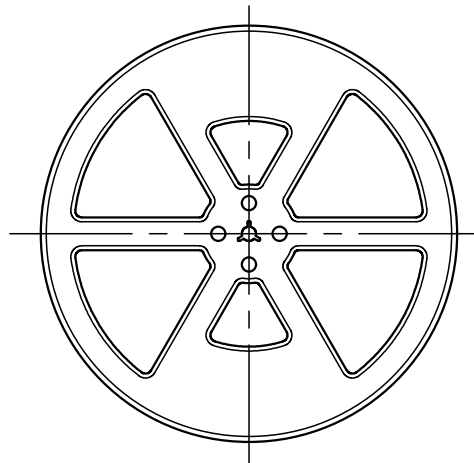


REEL DIMENSION (S=1:5)

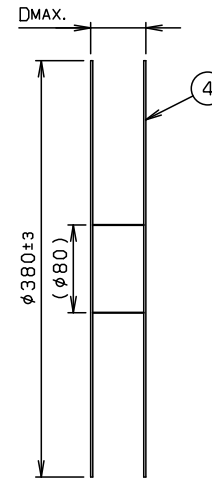

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	14 5600 0XX 200 883 M +	1000			10 5600 0XX 200 883 M +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	PET		
4	REEL		1	POLYSTYRENE		

注 記
NOTE


- 梱包数量 : 1000個/リール
PACKING QUANTITY : 1000 ea/reel
- 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



極 数 NO. OF POS.	A	B	C	D
30	20.2	40.4	44.0	50.4
40	20.2	40.4	44.0	50.4

※この表は2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.

- 引出し方向
USER DIRECTION OF FEED

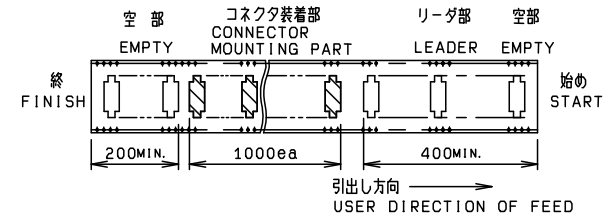

- 型 番
P/N

14 5600 0XX 200 883 M +

極 数
NO. OF POS.バリエーション
VARIATION

200 : 金具小

SMALL ANCHOR PLATE

めっき
PLATING

+ : Sn-Cu

※この注記の1～3は2ページ目にのみ適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-2 ONLY.

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		REFER TO SHEET 1/2			
10 ≤ X < 30 ±0.25		mm		3RD		NO.	EDN/DCN	DATE	ISSUE
30 ≤ X ±0.3		SCALE		DATE		PART NAME / 品名			
ANGLE / 角度		2 : 1		2004/04/19		SERIES 5600 PLUG ASSY TAPING			
DRAWN		DESIGNED		CHECKED		PART NO. / 型番			
T. KOMATSU		C. YAMATO		K. ONO		14 5600 0XX 200 883 M +			
						DWG NO. / 図番			
						BJS 5600031			
						SHEET/REV			
						2/2 B			

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS