
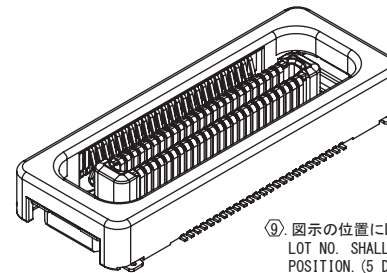
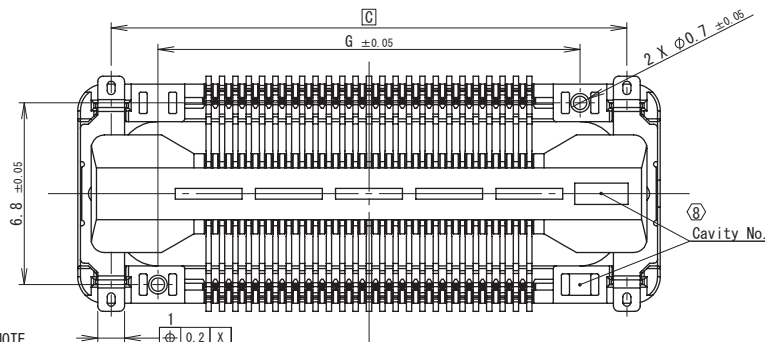
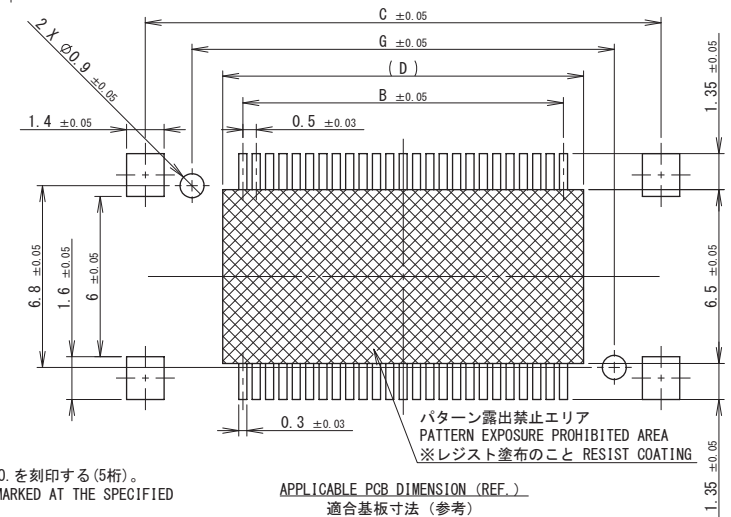

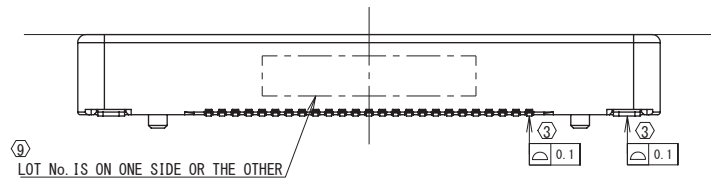
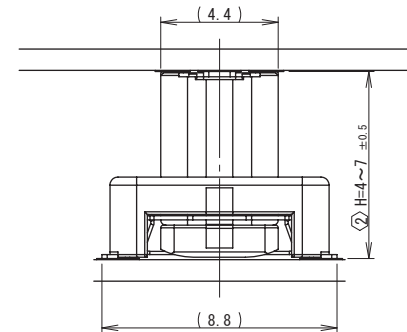


Pin Num.	A	B	C	D	E	F	G
20	14.3	4.5	11.8	6	18.3	7.86	8.3
30	16.8	7	14.3	8.5	20.8	10.36	10.8
40	19.3	9.5	16.8	11	23.3	12.86	13.3
50	21.8	12	19.3	13.5	25.8	15.36	15.8
60	24.3	14.5	21.8	16	28.3	17.86	18.3
70	26.8	17	24.3	18.5	30.8	20.36	20.8
80	29.3	19.5	26.8	21	33.3	22.86	23.3

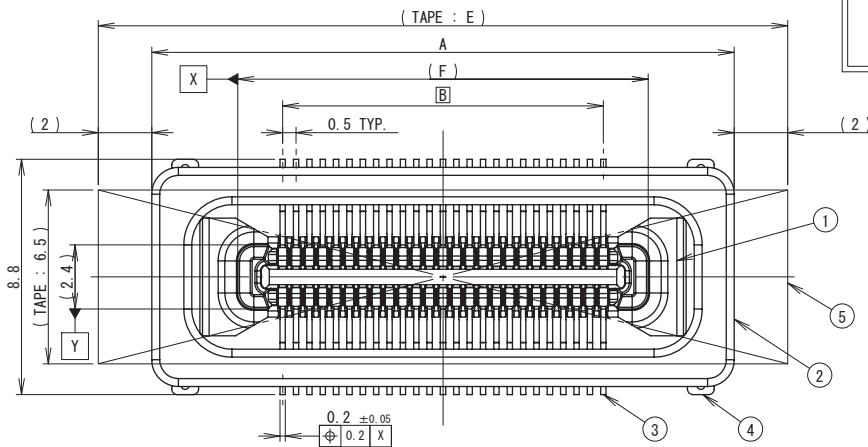

⑨. 図示の位置にLOT NO. を刻印する(5桁)。
LOT NO. SHALL BE MARKED AT THE SPECIFIED
POSITION. (5 DIGIT)

Z 2 18 X (2017/02/18)

工場コード(Factory Code) 1、2、～29、30、31。
製造日(Day) 1、2、～9、X、Y、Z。
製造月(Month) 2000～2009：A、B、～K(NOT USE"1")
製造年(Year) 2010～2019：0、1、～9
(20YEAR CYCLE)

※この注記は1ページ目にのみ適用
※THIS NOTE IS APPLICABLE TO SHEET-1 ONLY.

1. フローティング可動量 (可動側 : PLUG)
 FLOATING RANGE (MOVABLE SIDE : PLUG)
 ピッチ方向 : $\pm 0.5\text{mm}$ / PITCH DIRECTION
 スパン方向 : $\pm 0.5\text{mm}$ / SPAN DIRECTION
 対角方向 : $\pm 0.5\text{mm}$ / DIAGONAL


- ②. 高さ許容量 : $\pm 0.5\text{mm}$ / HEIGHT RANGE

- ③. コンタクトテール、金具輪郭度0.1mm MAX.
CONTACT TAIL, ANCHOR PLATE COPLANARITY 0.1mm MAX.

4. 使用時は、コネクタのみで基板を保持せずスペーサなど設置下さい。
IN ADDITION TO THE CONNECTOR, INSERT A SPACER OR SUCH BETWEEN THE
MATED BOARD.

5. フローティングを最大ストロークさせた後に再利用する場合は、事前に確認の上ご使用ください。
USE THE PLUG CONNECTOR ON THE CONFIRMATION WHEN REUSING AFTER HAVING LET IT STROKE FLOATING TO THE MAXIMUM.

6. 片側だけで抜去（嵌合）しないで下さい。可能な限り両サイド均等に抜去して下さい。
PLEASE DO NOT UNMATE(MATE) ONLY ONE SIDE. BE SURE TO UNMATE EQUALLY BOTH SIDES AS MUCH AS POSSIBLE.



7. TAPEは嵌合面の凹凸により、隙間が生じる場合があります。
A CLEARANCE WILL BE MADE BETWEEN VACUUM TAPE AND THE CONNECTOR
BY THE LACK OF FLATNESS ON THE CONNECTOR TOP.

- ⑧. 図示の位置にCAVITY NO. を刻印する(数字の1~4)。
CAVITY NO. SHALL BE MARKED AT THE SPECIFIED
POSITION. (Numbers 1 to 4)

TOLERANCE / 一般公差(S)		MATERIAL / 材質		F DCN25079		2025/02/28		Y. OKABE		M. YOSHIDA					
10 ≦ X < 10 ± 0.2 10 ≦ X < 30 ± 0.25 30 ≦ X ± 0.3				E DCN24714		2024/12/26		Y. OKABE		M. YOSHIDA					
		UNIT	ANGLE	O EDN18198		2018/07/09		S. MORITA		F. IKEGAMI	M. YOSHIDA				
		mm	3RD	NO.		EDN/DCN		DATE		ISSUE	CHECKED	APPROVED			
ANGLE / 角度		SCALE	DATE	PART NAME / 品名											
± 3°		5 : 1	2018/07/09	SERIES 5655 PLUG ASSY ST SMT 0.5mm PITCH FLOATING BOARD TO BOARD											
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番											
S. MORITA	S. MORITA	F. IKEGAMI	M. YOSHIDA	14 5655 XXX 00X 829 + T											
KYOCERA				DWG. NO. / 図番								SHEET		REV	
				BJS 5655001								1/2		F	

