
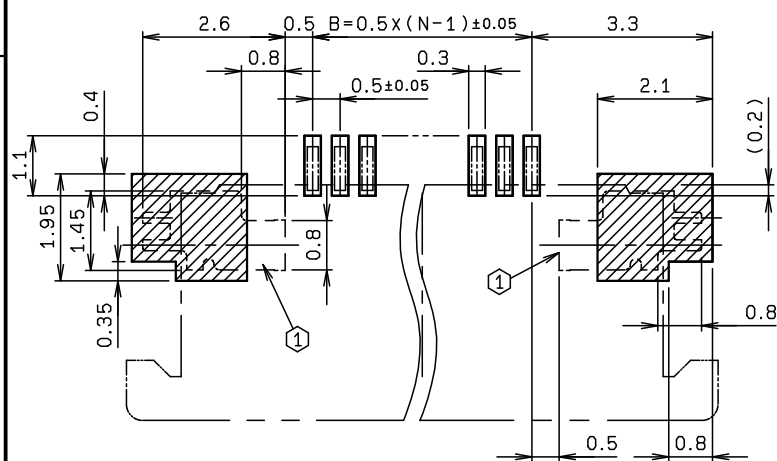
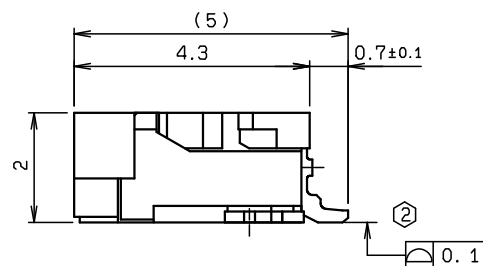
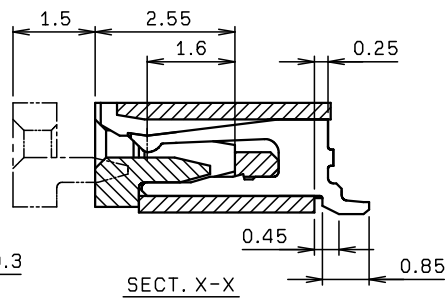


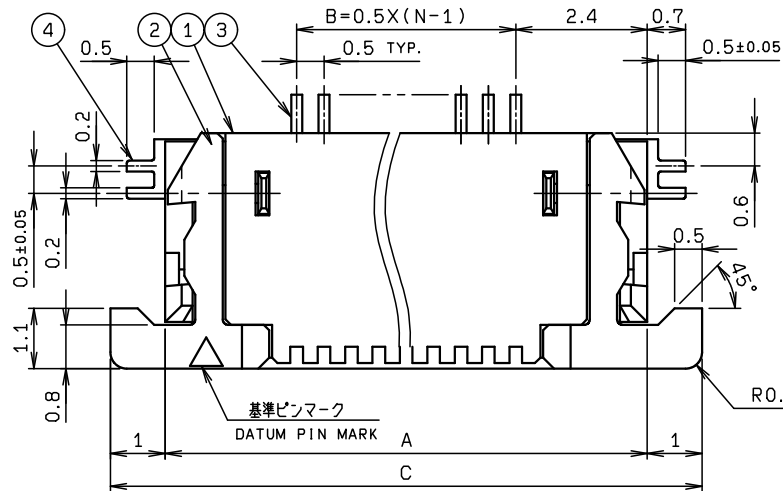

推奨基板取付寸法（コネクタ搭載側）

MOUNTING LAYOUT
(CONN. MOUNTING SIDE)

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING PLASTIC		COLOR: BLACK UL94V-0
2	SLIDER		1	HEAT RESISTING PLASTIC		COLOR: BLACK UL94V-0
3	CONTACT		N	PHOS-BRONZE		t=0. 2
4	ANCHOR PLATE		2	PHOS-BRONZE		t=0. 2

注 記
NOTE


- ① この部分は金具位置の為あけておくこと。
OPEN THIS SPACE FOR MOUNT METAL.
- ② コンタクトテール及び固定金具は基板より最大浮き
0.1とする。
CONTACT TAIL AND MOUNT METAL
HEIGHT SHALL BE 0.1MAX.
- ③ 適用FPC FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC FFC
FROM 1 OR 2.
4. FPC FFCめっき仕様
FPC FFC PLATING SPEC.
- 接点部 AU 0.1μMIN.
CONTACT AREA AU 0.1μMIN.
- ※この注記の1~4は1ページ目にてのみ適用
※THIS NOTES 1 TO 4 ARE APPLICABLE TO
SHEET-1 ONLY.

極數 NO. OF POS.	A	B	C	D
5	6.8	2.0	8.8	3.1
6	7.3	2.5	9.3	3.6
7	7.8	3.0	9.8	4.1
8	8.3	3.5	10.3	4.6
9	8.8	4.0	10.8	5.1
10	9.3	4.5	11.3	5.6
11	9.8	5.0	11.8	6.1
12	10.3	5.5	12.3	6.6
13	10.8	6.0	12.8	7.1
14	11.3	6.5	13.3	7.6
15	11.8	7.0	13.8	8.1
16	12.3	7.5	14.3	8.6
17	12.8	8.0	14.8	9.1
18	13.3	8.5	15.3	9.6
19	13.8	9.0	15.8	10.1
20	14.3	9.5	16.3	10.6
21	14.8	10.0	16.8	11.1
22	15.3	10.5	17.3	11.6
23	15.8	11.0	17.8	12.1
24	16.3	11.5	18.3	12.6
25	16.8	12.0	18.8	13.1
26	17.3	12.5	19.3	13.6
27	17.8	13.0	19.8	14.1
28	18.3	13.5	20.3	14.6
29	18.8	14.0	20.8	15.1
30	19.3	14.5	21.3	15.6

※この表は1ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 ONLY.




		FPC		FFC	
		1	2	1	2
M		0.5±0.12	0.5±0.1	0.5±0.1	0.5±0.08
P		0.5±0.02	0.5±0.05	0.5±0.03	0.5±0.05
B		B±0.03	B±0.05	B±0.03	B±0.05
W		W±0.07	W±0.07	W±0.07	W±0.07
WD		0.35 ^{+0.04} _{-0.03}	0.35±0.05	0.30 ^{+0.05} _{-0.02}	0.30 ^{+0.07} _{-0.01}

適用FPC FFC寸法
APPLICABLE FPC FFC

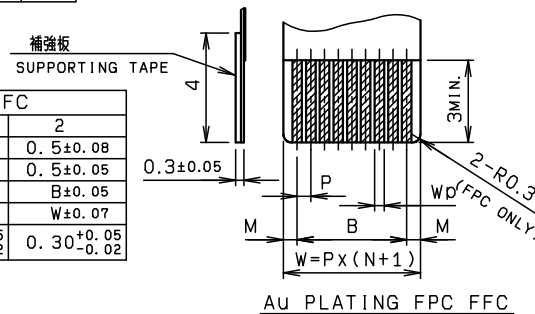


RoHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格		E DCN20569		2020/06/03		Y. SANPEI		Y. MANBA		Y. FUJII			
X <10 ±0.2		UNIT mm		ANGLE 3RD		D DCN-368		2008/05/13		T. MAKABE		N. KITAGAWA		T. SATOH	
10≤ X <30 ±0.25						O EDN-1060		2004/09/28		K. MATAGA		A. HAGIWARA		N. HAYASHI	
30≤ X ±0.3						NO. EDN/DCN		DATE		ISSUE		CHECKED		APPROVED	
ANGLE / 角度 ±3°		SCALE 10 : 1		DATE 2004/09/28		PART NAME / 品名 SERIES 6262 FPC ASSY UPPER CONTACT LARGE TAB, 2 LEG ANCHOR PLATE, AU									
DRAWN T. KOMATSU		DESIGNED K. MATAGA		CHECKED A. HAGIWARA		APPROVED N. HAYASHI		PART NO. / 型番 08 6262 0XX 340 XXX +							
KYOCERA						DWG NO. / 図番 BJS 6262020						SHEET REV 1/2 E			

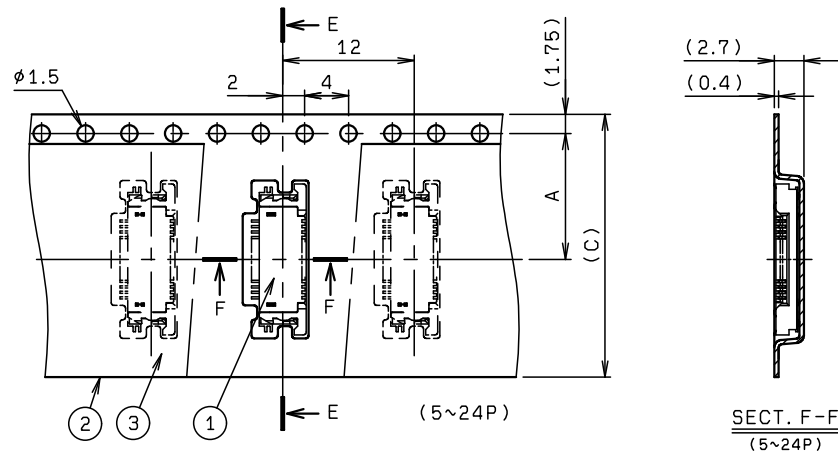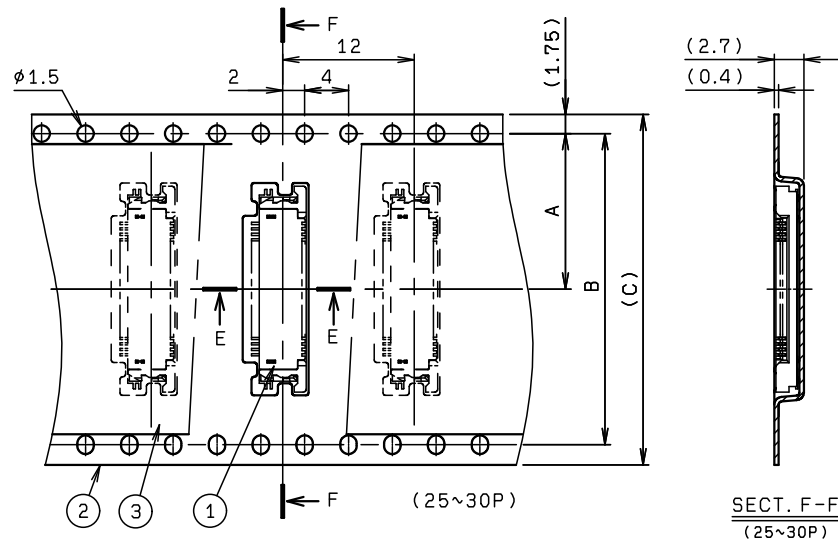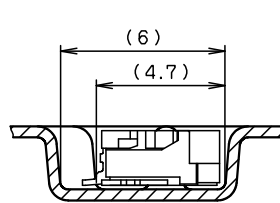SECT. F-F
(5~24P)SECT. F-F
(25~30P)

SECT. E-E (S=5:1)

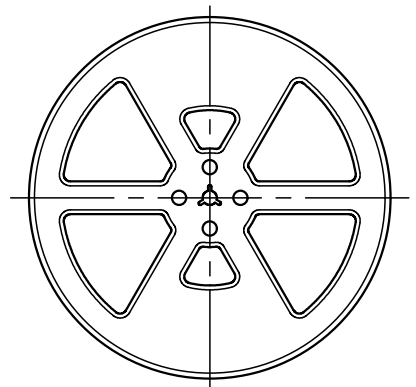

REEL DIMENSION (S=1:5)

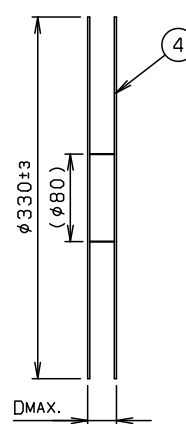


CONFIDENTIAL

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	08 6262 0XX 340 XXX +	2000			00 6262 0XX 340 XXX +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

1. 梱包数量 : 2000個/リール
PACKING QUANTITY : 2000ea/REEL
2. 納入時のリール巻方向
DIRECTION OF REELING IN DELIVERY



3. 引出し方向

USER DIRECTION OF FEED

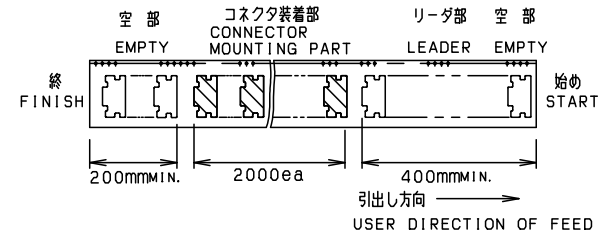4. 型番
P/N

08 6262 0XX 340 XXX +

極数
NO. OF POS.バリエーション
VARIATION340 : 金具小タイプ
SMALL METAL TYPEめっきコード
PLATING CODE829+: Au PLATING (WITH NI DAM)
(ANCHOR PLATE Sn-Cu)846+: Au PLATING (SELECTIVE)
(ANCHOR PLATE Sn-Cu)

※この注記の1~3は2ページ目にも適用

※THIS NOTES 1 TO 3 ARE APPLICABLE TO
SHEET-2 ONLY.

極数 NO. OF POS.	A	B	C	D
5	7.5	—	16.0	22.4
6	7.5	—	16.0	22.4
7	11.5	—	24.0	30.4
8	11.5	—	24.0	30.4
9	11.5	—	24.0	30.4
10	11.5	—	24.0	30.4
11	11.5	—	24.0	30.4
12	11.5	—	24.0	30.4
13	11.5	—	24.0	30.4
14	11.5	—	24.0	30.4
15	11.5	—	24.0	30.4
16	11.5	—	24.0	30.4
17	11.5	—	24.0	30.4
18	11.5	—	24.0	30.4
19	11.5	—	24.0	30.4
20	11.5	—	24.0	30.4
21	11.5	—	24.0	30.4
22	11.5	—	24.0	30.4
23	11.5	—	24.0	30.4
24	11.5	—	24.0	30.4
25	14.2	28.4	32.0	38.4
26	14.2	28.4	32.0	38.4
27	14.2	28.4	32.0	38.4
28	14.2	28.4	32.0	38.4
29	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4

※この表は2ページ目にも適用
※THIS CHART IS APPLICABLE TO
SHEET-2 ONLY.ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格									
X <10 10 ≤ X <30 30 ≤ X	±0. 2 ±0. 25 ±0. 3	UNIT		ANGLE		REFER TO SHEET 1/2					
		mm		3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
		SCALE		DATE		PART NAME / 品名					
ANGLE / 角度		2 : 1		2004/09/28		SERIES 6262 EMOSS TAPE ASSY FPC ASSY AU PLATING WITH ANCHOR PLATE. TAB					
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番							
T. KOMATSU	K. MURAKAMI	A. HAGIWARA	N. HAYASHI	08 6262 0XX 340 XXX +							
				DWG NO. / 図番				SHEET/REV			
				BJS 6262020				2/2 E			

KYOCERA