

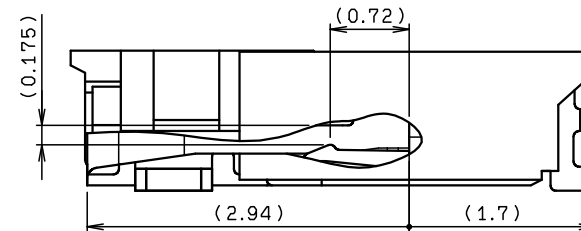


HALOGEN-Free

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTANCE PLASTIC		UL94V-0 COLOR: WHITE
2	ACTUATOR		1	HEAT RESISTANCE PLASTIC		UL94V-0 COLOR: BLACK
3	CONTACT		N	COPPER ALLOY		t=0.15 AU
4	ANCHOR PLATE(LEFT)		1	SUS		t=0.2 AU
5	ANCHOR PLATE(RIGHT)		1	SUS		t=0.2 AU

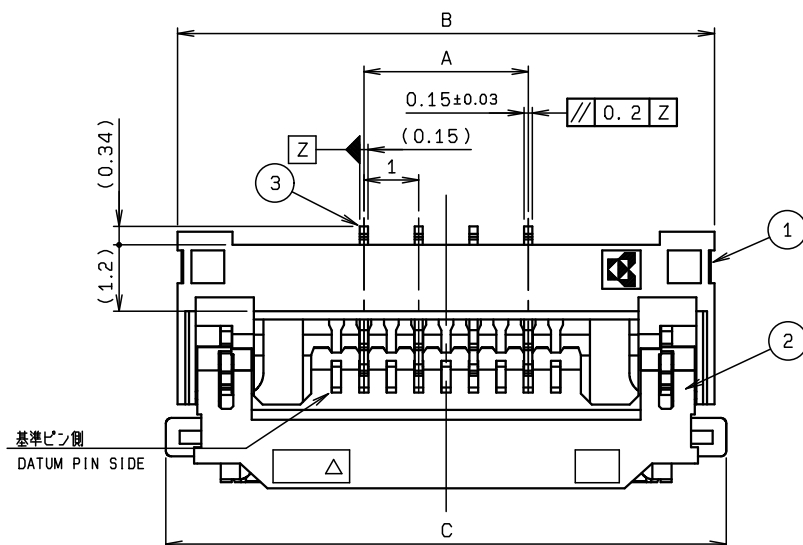

SECT. X-X (S=20:1)

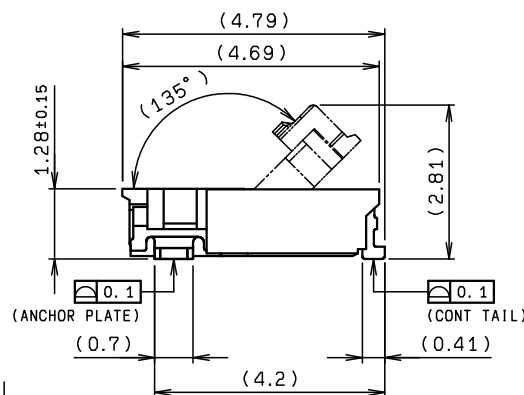

種数 NO. OF POS.	A	B	C	D	E	F
4	3.0	9.8	10.23	7.02	7.7	10.4
5	4.0	10.8	11.23	8.02	8.7	11.4
6	5.0	11.8	12.23	9.02	9.7	12.4
7	6.0	12.8	13.23	10.02	10.7	13.4
8	7.0	13.8	14.23	11.02	11.7	14.4
9	8.0	14.8	15.23	12.02	12.7	15.4
10	9.0	15.8	16.23	13.02	13.7	16.4
11	10.0	16.8	17.23	14.02	14.7	17.4
12	11.0	17.8	18.23	15.02	15.7	18.4
13	12.0	18.8	19.23	16.02	16.7	19.4
14	13.0	19.8	20.23	17.02	17.7	20.4
15	14.0	20.8	21.23	18.02	18.7	21.4


※この表は1〜3ページ目のみ適用
 ※THIS CHART IS APPLICABLE TO 1 TO 3 PAGE ONLY.
 ※生産設備の有無については別途問い合わせをお願い致します
 ※AS FOR EACH PIN COUNT PRODUCT,
 PLEASE ASK OUR SALES REPRESENTATIVE
 TO MAKE SURE YAHT THE PRODUCTION EQUIPMENT
 IS AVAILABLE.

注 記
NOTE

1. コンタクトテール及び固定金具は基板より
 最大浮き0.1mmとする。
 CONTACT TAIL AND ANCHOR PLATE
 HEIGHT SHALL BE 0.1MAX.

※この注記は1〜3ページ目のみ適用
 ※THIS NOTES IS APPLICABLE TO
 1 TO 3 PAGE ONLY.

ROHS規制対応
 COMPLIANT WITH
 ROHS REGULATIONS

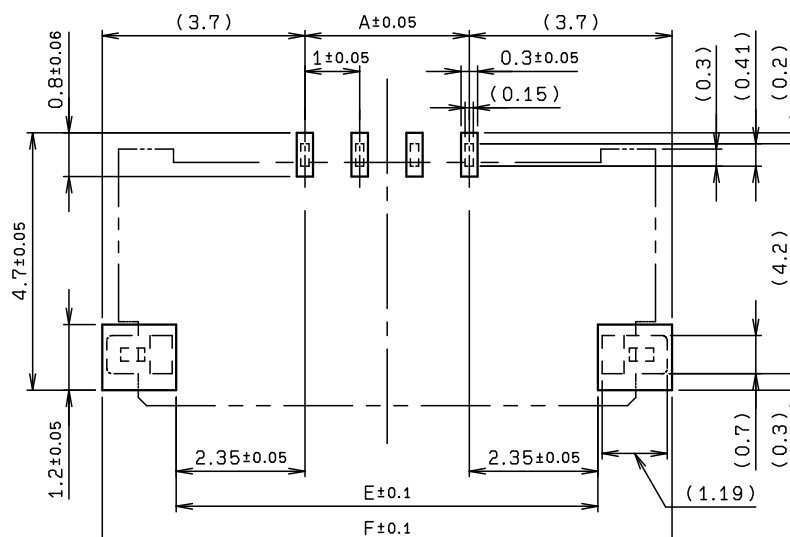

参考パターン寸法
REFERENCE PATTERN LAYOUT


TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格											
X <10 ±0.2 10≤ X <30 ±0.25 30≤ X ±0.3	UNIT		ANGLE		A		DCN-336		2017/04/04				
	mm		3RD		O		EDN-054		2017/02/02	Y. MANBA	N. NAKAJIMA	Y. FUJUI	
	SCALE		DATE		NO.		EDN/DCN		DATE	ISSUE	CHECKED	APPROVE	
	ANGLE / 角度		10 : 1		2017/02/02		PART NAME / 品名						
FPC/FFC CONNECTOR ASSY RA SMT													
1.0mm PITCH ZIF TYPE													
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番									
Y. MANBA	Y. MANBA	N. NAKAJIMA	Y. FUJUI	04 6811 6XX 090 846 +									
 KYOCERA Corporation				DWG NO. / 図番								SHEET/REV	
				BJS 6811009								1/4 A	



KYOCERA Corporation

HALOGEN-Free

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

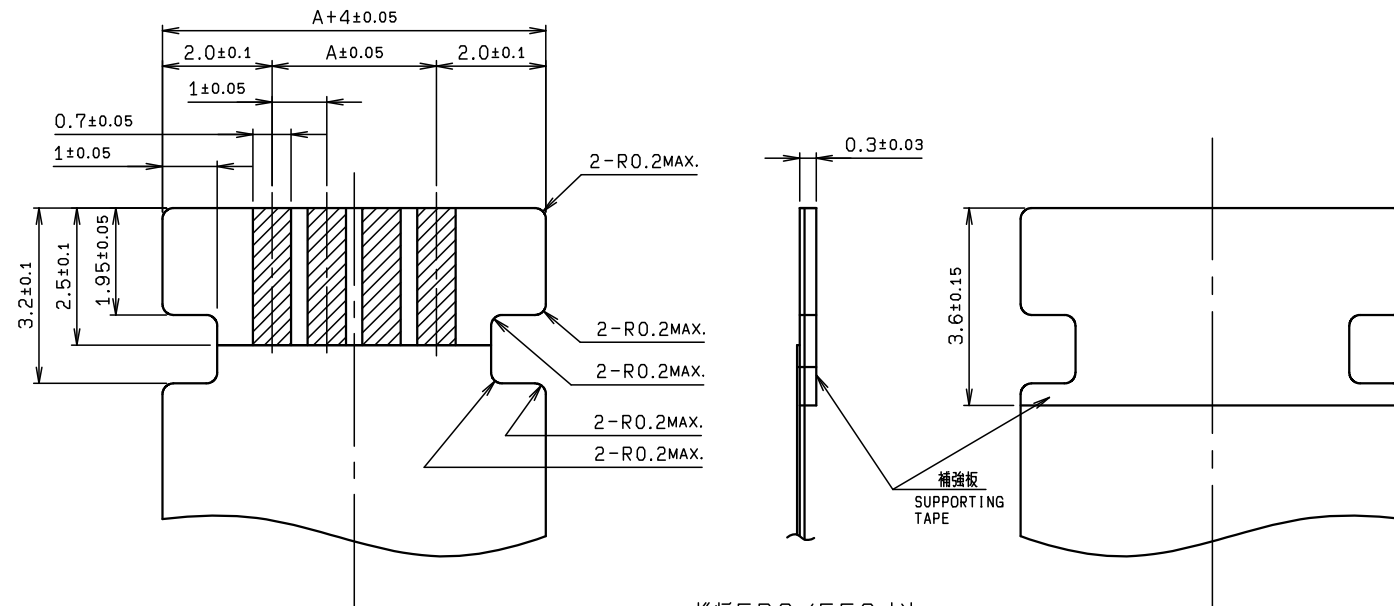

注 記
NOTE

1. M寸法, Wp寸法については推奨FPC/FFCを選択すること。
DIMENSION M . Wp . SELECT AN RECOMMENDED FPC/FFC


	FPC	FFC
M	1.5±0.1	1.5±0.08
Wp	0.35±0.05	0.3±0.05

※この注記は2ページ目にも適用
※THIS NOTES IS APPLICABLE TO SHEET-2 ONLY.

推奨FPC/FFC寸法
RECOMMENDED FPC/FFC

FPC構成
FPC STRUCTURE


(推奨仕様)

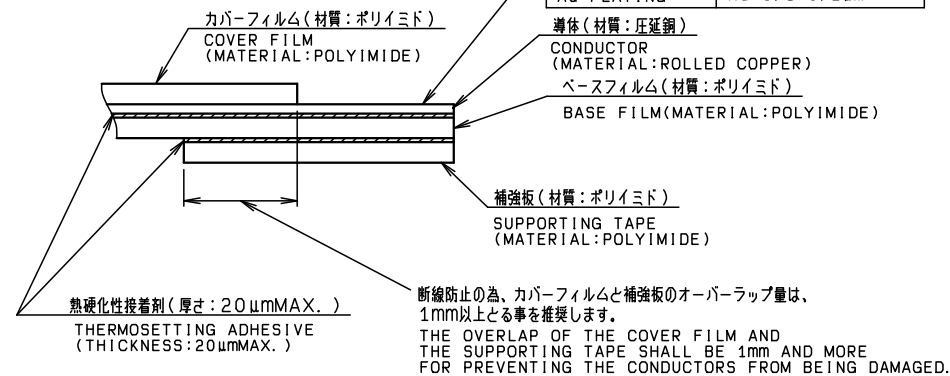

表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	NI UNDER COAT 3±2μm AU: 0.1~0.2μm

FFC構成
FFC STRUCTURE

(推奨仕様)

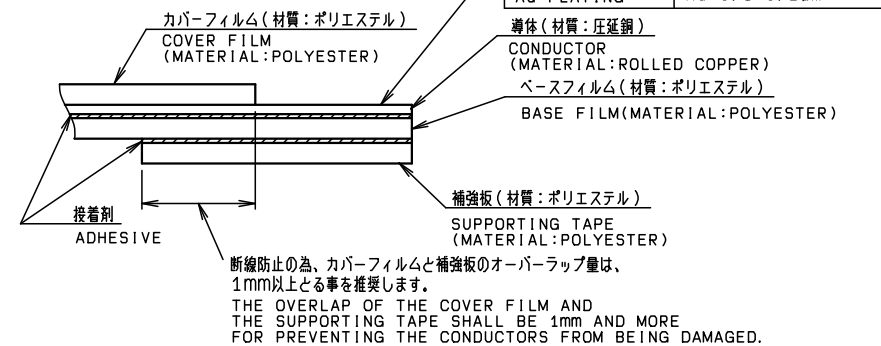

表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	NI UNDER COAT 3±2μm AU: 0.1~0.2μm

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS


TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格									
X <10 ±0.2		UNIT		ANGLE		REFER		TO SHEET		1/4	
10≤ X <30 ±0.25		mm		3RD		NO.		EDN/DCN		DATE	
30≤ X ±0.3								ISSUE		CHECKED	
ANGLE / 角度		SCALE		DATE		PART NAME / 品名				APPROVED	
±3°		10 : 1		2017/02/02		FPC/FFC CONNECTOR ASSY RA SMT					
						1.0mm PITCH ZIF TYPE					
DRAWN		DESIGNED		CHECKED		APPROVED		PART NO. / 型番			
Y. MANBA		Y. MANBA		N. NAKAJIMA		Y. FUJUI		04 6811 6XX 090 846 +			
KYOCERA Corporation						DWG NO. / 図番				SHEET/REV	
						BJS 6811009				2/4 A	

KYOCERA

KYOCERA Corporation

HALOGEN-Free

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
-----	-------------	----------	-----	----------	---------	---------

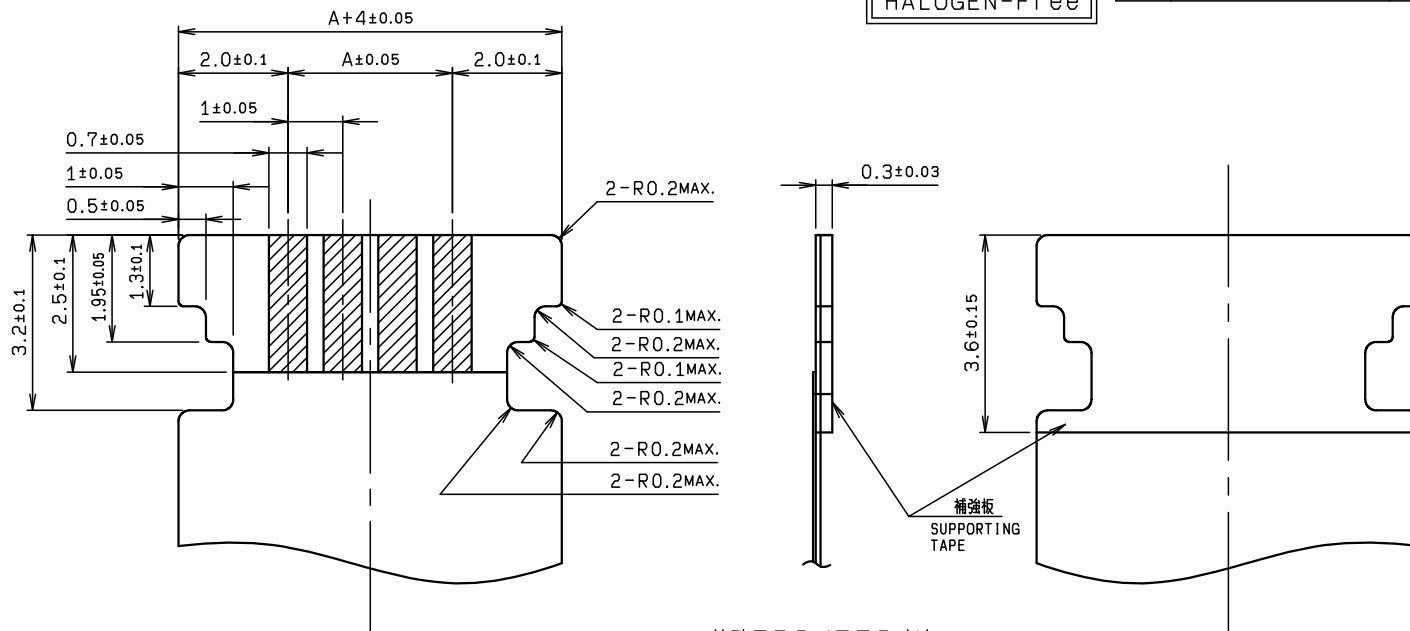

注 記
NOTE

1. M寸法, Wp寸法については特殊FPC/FFCを選択すること。
DIMENSION M . Wp . SELECT AN SPECIAL SHAPED FPC/FFC


	FPC	FFC
M	1.5±0.1	1.5±0.08
Wp	0.35±0.05	0.3±0.05

※この注記は3ページ目のみ適用
※THIS NOTES IS APPLICABLE TO SHEET-3 ONLY.

特殊FPC/FFC寸法
DIMENSIONS FOR
SPECIAL SHAPED FPC/FFC

FPC構成
FPC STRUCTURE

(推奨仕様)

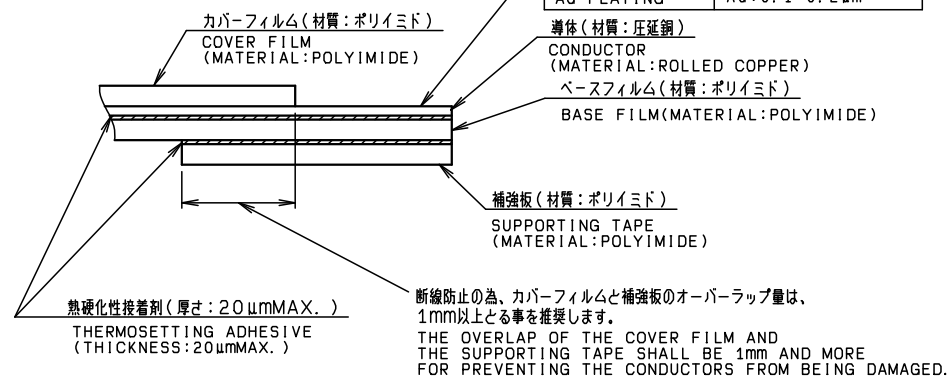


表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	NI UNDER COAT 3±2µm AU: 0.1~0.2µm

導体 (材質: 圧延銅)
CONDUCTOR
(MATERIAL: ROLLED COPPER)
ベースフィルム (材質: ポリイミド)
BASE FILM (MATERIAL: POLYIMIDE)

補強板 (材質: ポリイミド)
SUPPORTING TAPE
(MATERIAL: POLYIMIDE)

FFC構成
FFC STRUCTURE

(推奨仕様)

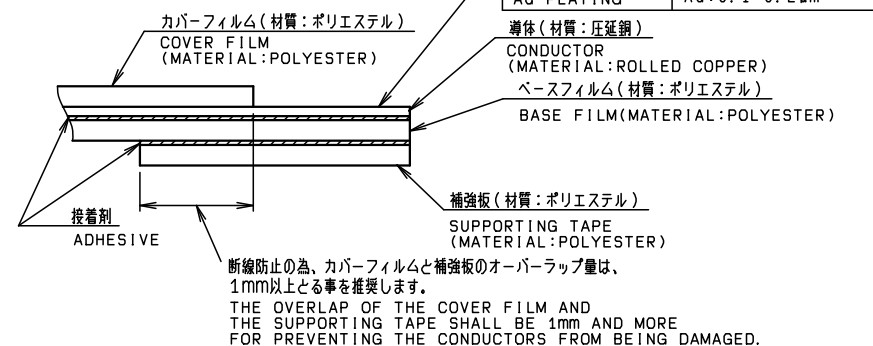

表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	NI UNDER COAT 3±2µm AU: 0.1~0.2µm

導体 (材質: 圧延銅)
CONDUCTOR
(MATERIAL: ROLLED COPPER)
ベースフィルム (材質: ポリエステル)
BASE FILM (MATERIAL: POLYESTER)

補強板 (材質: ポリエステル)
SUPPORTING TAPE
(MATERIAL: POLYESTER)

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2 10 ≤ X < 30 ±0.25 30 ≤ X ±0.3		UNIT mm		ANGLE 3RD		REFER TO SHEET 1/4			
ANGLE / 角度 ±3°		SCALE 10:1		DATE 2017/02/02		NO.	EDN/DCN	DATE	ISSUE
DRAWN Y. MANBA		DESIGNED Y. MANBA		CHECKED N. NAKAJIMA		APPROVED Y. FUJUI		PART NAME / 品名	
								FPC/FFC CONNECTOR ASSY RA SMT	
								1.0mm PITCH ZIF TYPE	
								PART NO. / 製番	
								04 6811 6XX 090 846 +	
								DWG NO. / 図番	
								BJS 6811009	
								SHEET/REV	
								3/4 A	

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

KYOCERA

KYOCERA Corporation


HALOGEN-Free

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6811 6XX 090 846 +	4000			00 6811 6XX 090 846 +
2	EMBOSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


注 記
NOTE

1. 梱包数量 : 4000 個/リール
PACKING QUANTITY : 4000 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY



3. 引出し方向
USER DIRECTION OF FEED

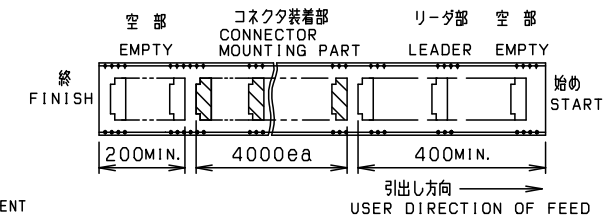

4. 型番
P/N 04 6811 6XX 090 846 +

6: ハロゲンフリー
HALOGEN-Free

種数
NO. OF POS.

9: 1.0mm PITCH TYPE

めっきコード
PLATING CODE
846+: Au(SELECTIVE)

※この注記は4ページ目にお適用

※THIS NOTES IS APPLICABLE TO SHEET-4 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS



種数 NO. OF POS.	A	B	C	D
4	11.5	—	24.0	30.4
5	11.5	—	24.0	30.4
6	11.5	—	24.0	30.4
7	11.5	—	24.0	30.4
8	11.5	—	24.0	30.4
9	14.2	28.4	32.0	38.4
10	14.2	28.4	32.0	38.4
11	14.2	28.4	32.0	38.4
12	14.2	28.4	32.0	38.4
13	14.2	28.4	32.0	38.4
14	14.2	28.4	32.0	38.4
15	20.2	40.0	44.0	50.4

※この表は4ページ目にお適用



※THIS CHART IS APPLICABLE TO
SHEET-4 ONLY.

※生産設備の有無については別途問い合わせをお願いします


※AS FOR EACH PIN COUNT PRODUCT.
PLEASE ASK OUR SALES REPRESENTATIVE
TO MAKE SURE YAHT THE PRODUCTION EQUIPMENT
IS AVAILABLE.

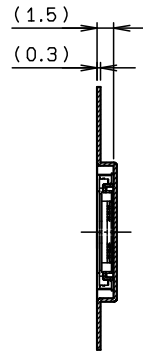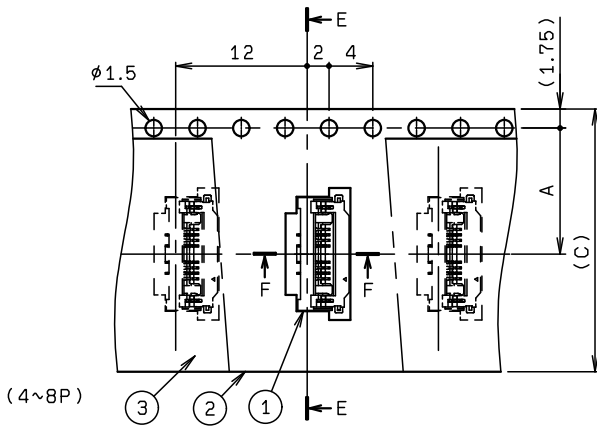

SECT. E-E
(4~8P)

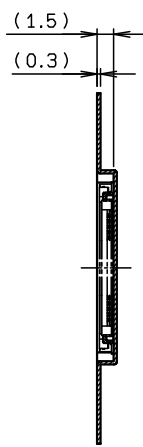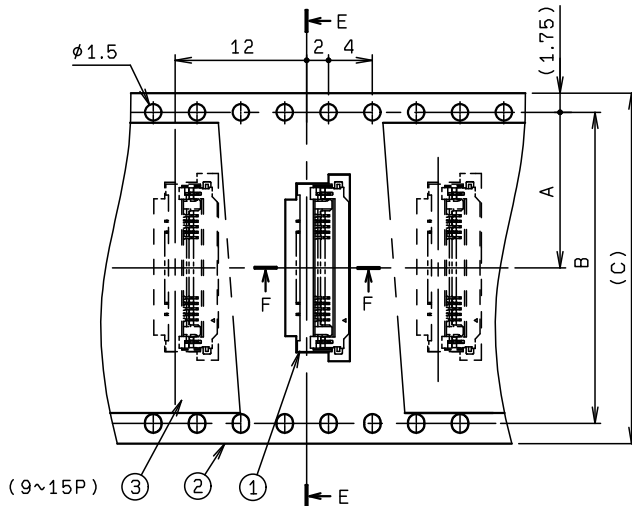

SECT. E-E
(9~15P)

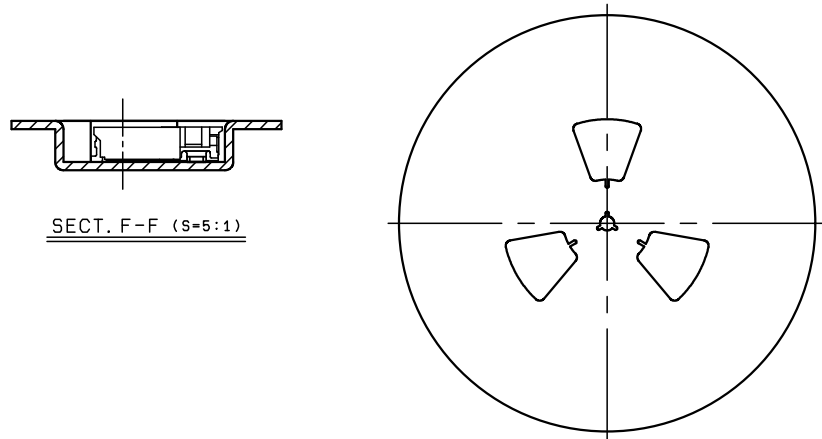

REEL DIMENSION (S=1:5)

TOLERANCE / 一般公差(S)		PRODUCT SPEC / 製品規格						
X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3		UNIT		ANGLE	REFER		TO SHEET	1/4
		mm		3RD	NO.		EDN/DCN	DATE
		SCALE		DATE	ISSUE		CHECKED	APPROVED
ANGLE / 角度		2 : 1		2017/02/02		PART NAME / 品名		
						FPC/FFC CONNECTOR ASSY RA SMT		
						0.5mm PITCH ZIF TYPE		
DRAWN	DESIGNED	CHECKED	APPROVED	PART NO. / 型番				
Y. MANBA	Y. MANBA	N. NAKAJIMA	Y. FUJUI	04 6811 6XX 090 846 +				
 KYOCERA Corporation				DWG NO. / 図番			SHEET/REV	
				BJS 6811009			4/4 A	