
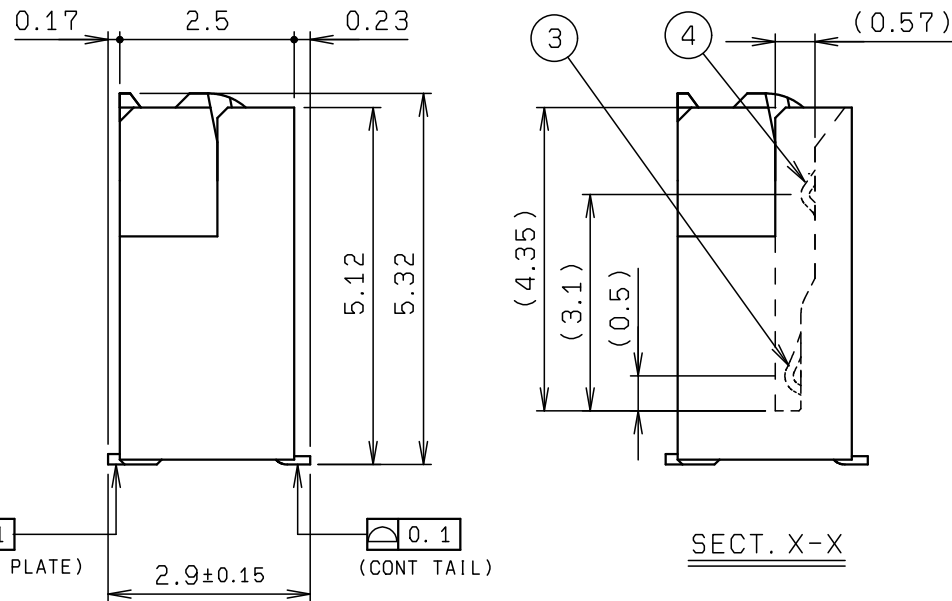
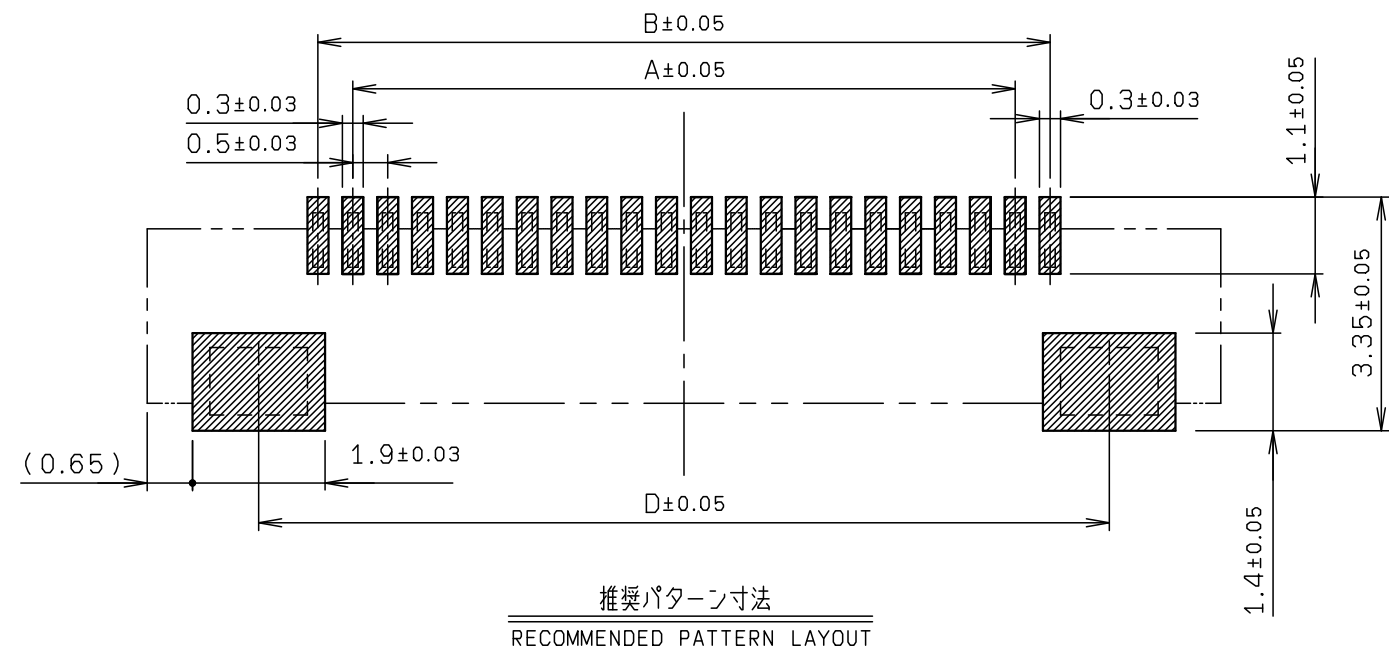
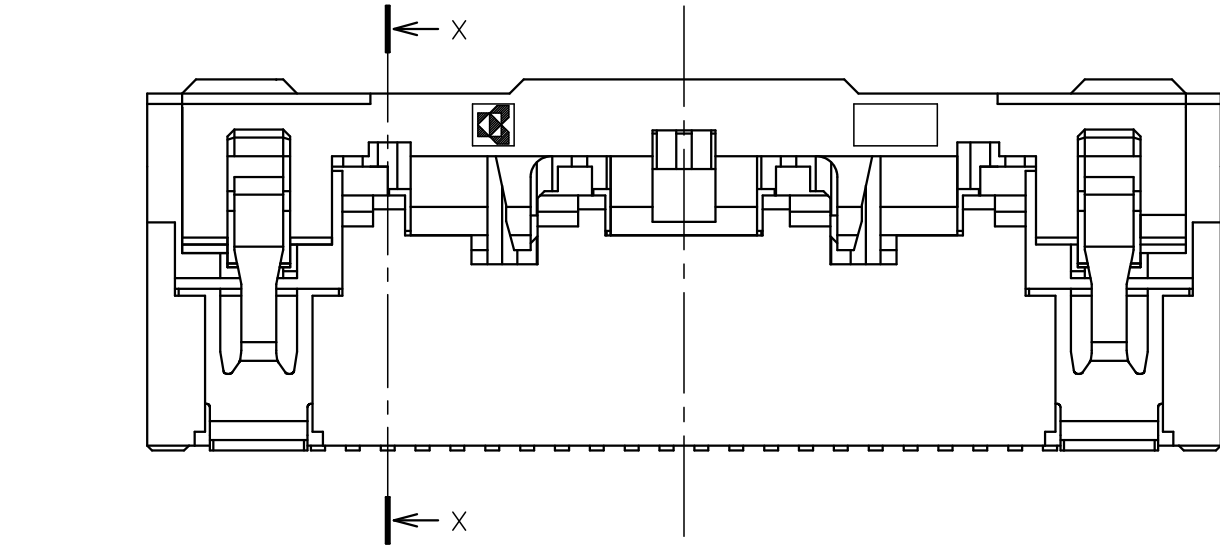


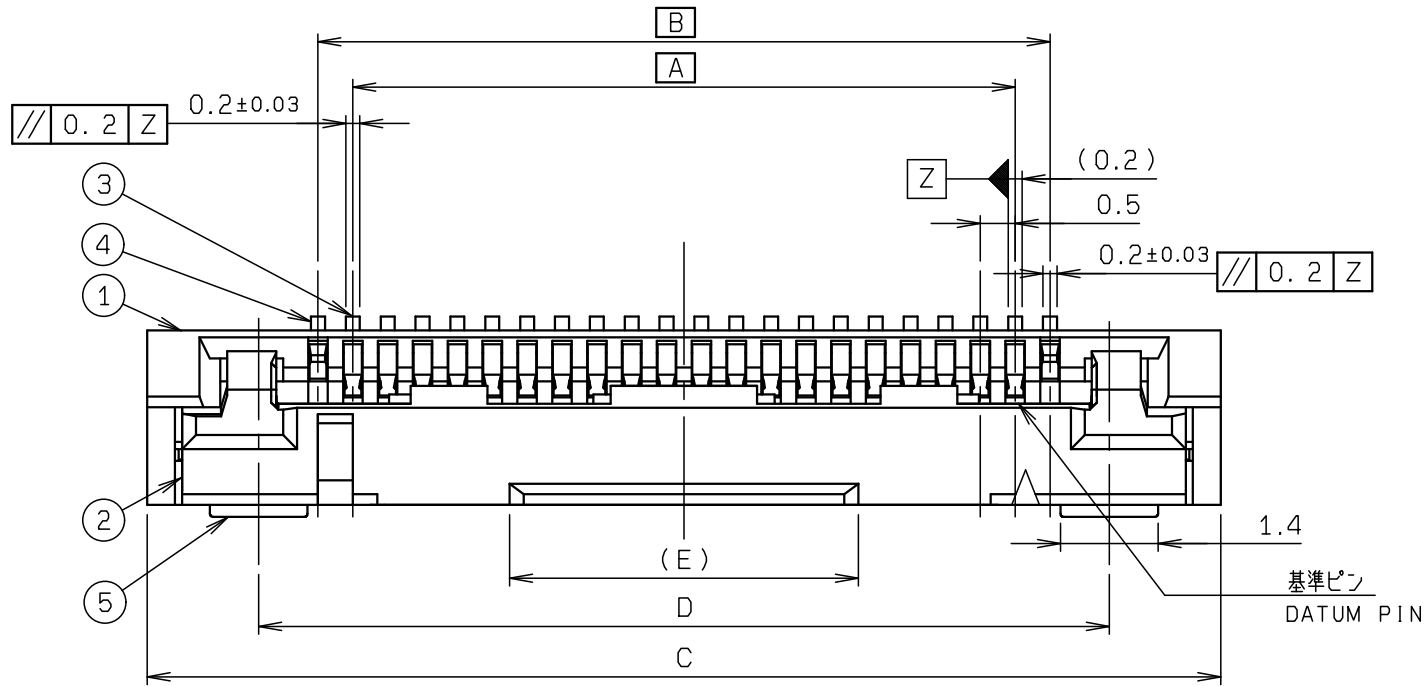

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING RESIN		
2	ACTUATOR		1	HEAT RESISTING RESIN		
3	CONTACT		N	PHOS. BRONZE		Au PLATING
4	GND CONTACT		2	COPPER ALLOY		Sn-Cu PLATING
5	ANCHOR PLATE		2	SUS		Sn-Cu PLATING

極 数 NO. OF POS.	A	B	C	D	E
10	4.5	5.5	10.4	7.2	3.0
15	7.0	8.0	12.9	9.7	5.0
20	9.5	10.5	15.4	12.2	5.0
30	14.5	15.5	20.4	17.2	8.8
40	19.5	20.5	25.4	22.2	8.8
50	24.5	25.5	30.4	27.2	8.8


※この表は1，2ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-1 AND SHEET-2 ONLY.

注 記
NOTE
1. コンタクトテール及び固定金具は基板より最大浮き0.1mmとする。
CONTACT TAIL AND ANCHOR PLATE HEIGHT SHALL BE 0.1MAX.
※この注記は1ページ目にのみ適用
※THIS NOTES IS APPLICABLE TO SHEET-1 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差(S) X <10 ±0.2 10 ≤ X <30 ±0.25 30 ≤ X ±0.3 ANGLE / 角度 ±3°		PRODUCT SPEC / 製品規格 UNIT mm ANGLE 3RD SCALE 9 : 1 DATE 2018/10/16		K	DCN22491	2022/08/25	S. MORITA	N. KITAGAWA	N. NAKAJIMA
				J	DCN22030	2022/01/14	S. MORITA	H. LU	A. TSUNEMURA
				O	EDN18317	2018/10/16	Y. MANBA	N. KITAGAWA	Y. FUJII
				NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
DRAWN Y. MANBA		DESIGNED Y. MANBA		CHECKED N. KITAGAWA		APPROVED Y. FUJII		PART NAME / 品名 0.5mm PITCH FPC/FFC CONN. ST SMT NON-ZIF TYPE	
								PART NO. / 型番 04 6817 6XX 000 846 +	
								DWG NO. / 図番 BJS 6817003	
								SHEET/REV 1/3 K	



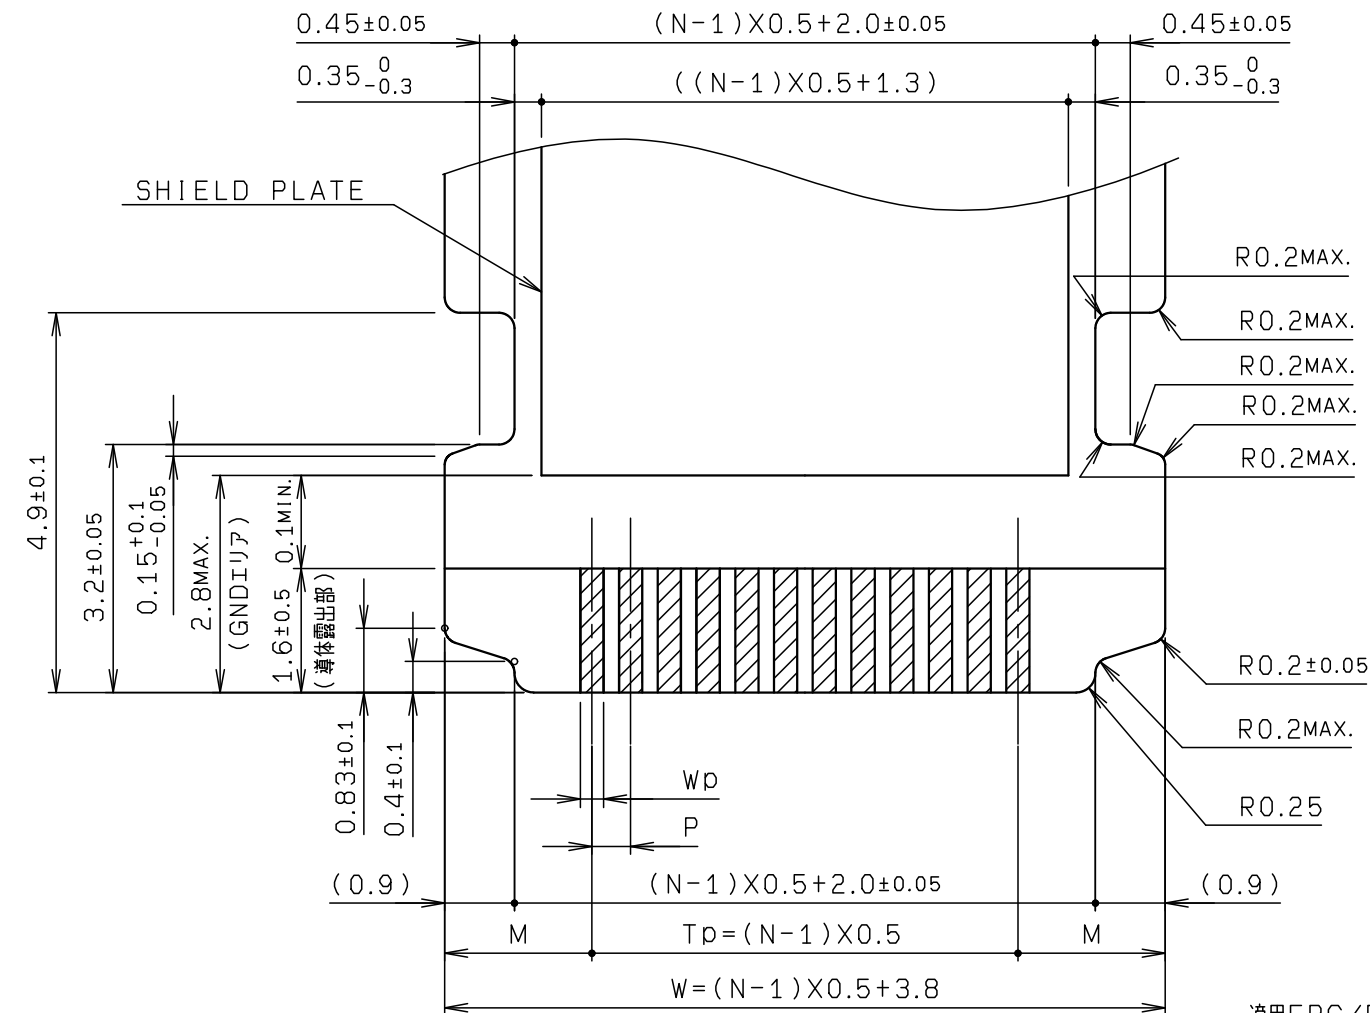


適用FPC/FFC寸法
APPLICABLE FPC/FFC


(推奨仕様)

FPC構成 FPC STRUCTURE

表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	Ni UNDER COAT:0.5μmMIN. Au:0.05~0.2μm

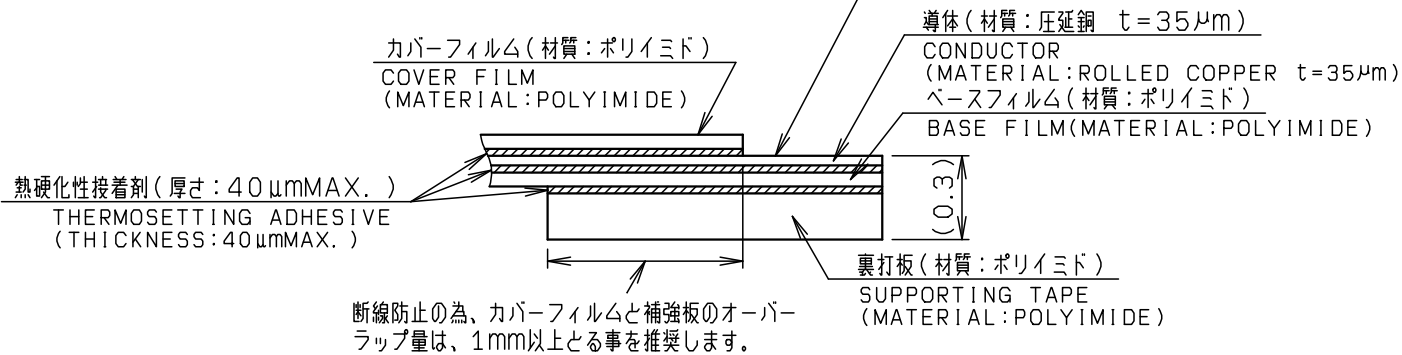


ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

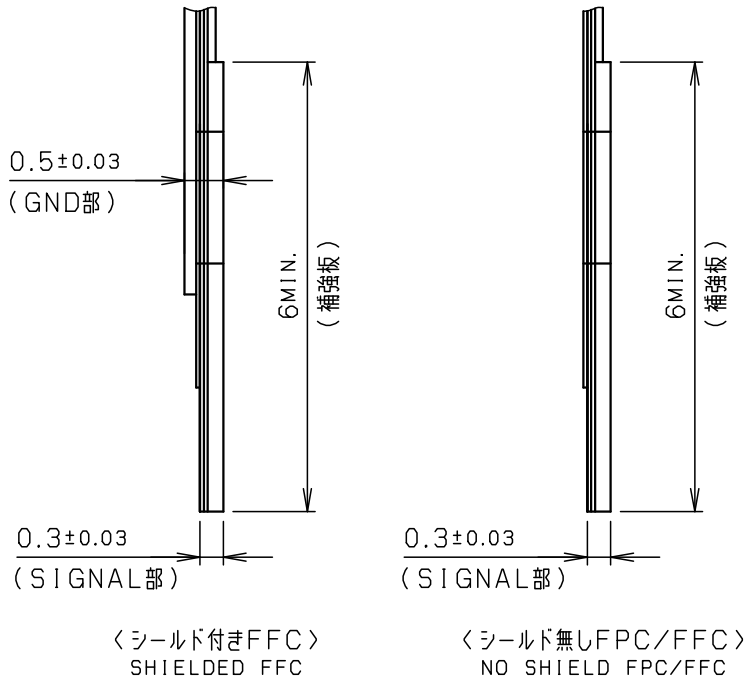

(推奨仕様)

FFC構成 FFC STRUCTURE

表面処理 PLATING	仕様 SPECIFICATION
金めっき AU PLATING	Ni UNDER COAT:0.5μmMIN. Au:0.05~0.2μm

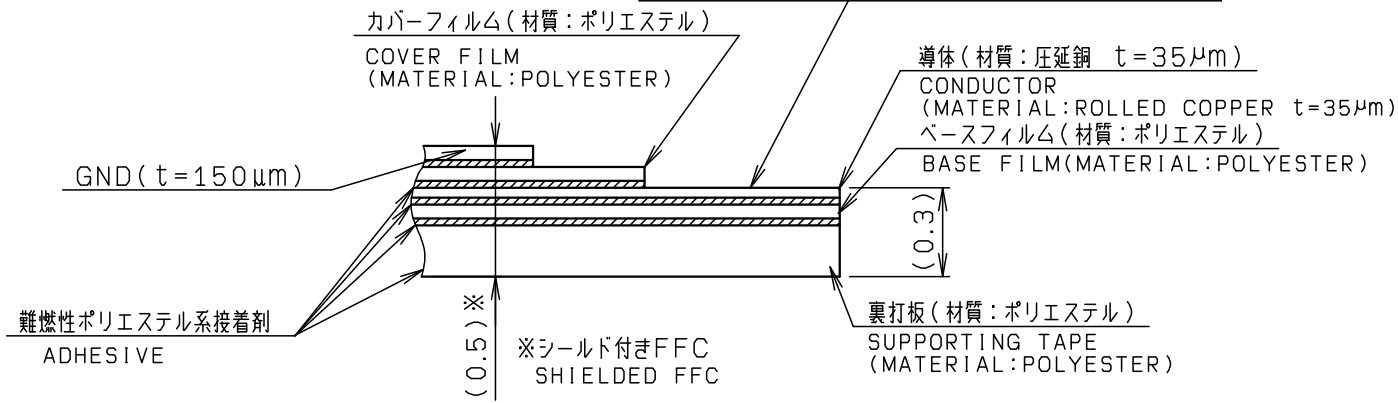

	FPC		FFC	
	1	2	1	2
M	1.9±0.1	1.9±0.07	1.9±0.1	1.9±0.07
P	0.5±0.03	0.5±0.05	0.5±0.03	0.5±0.05
TP	TP±0.03	TP±0.05	TP±0.03	TP±0.05
W	W±0.05	W±0.05	W±0.05	W±0.05
WP	0.35+0.02-0.04	0.35+0.02-0.04	0.3+0.05-0.02	0.3+0.05-0.02

※この表は2ページ目にのみ適用
嵌合するFPC(FFC)が上記FFC(FPC)の寸法/公差であっても嵌合は可能です。
※THIS CHART IS APPLICABLE TO SHEET-2 ONLY.
EVEN FPC(FFC) can be mated if it meets the above FFC(FPC) dimensions and tolerances.


注 記
NOTE

- 適用FPC/FFC寸法は1か2を選択のこと。
SELECT AN APPLICABLE FPC/FFC FROM 1 OR 2.
- Nは、極数を示す。
N: NUMBER OF CONTACTS

※この注記は2ページ目にのみ適用
※THIS NOTES IS APPLICABLE TO SHEET-2 ONLY.

TOLERANCE / 一般公差(S) X <10 ±0.2 10≦ X <30 ±0.25 30≦ X ±0.3 ANGLE / 角度 ±3°		PRODUCT SPEC / 製品規格 _____									
		UNIT mm		ANGLE 3RD		REFER TO SHEET		1/3			
		SCALE NJS		DATE 2018/10/16		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
						PART NAME / 品名 0.5mm PITCH FPC/FFC CONN. ST SMT NON-ZIF TYPE					
DRAWN Y. MANBA	DESIGNED Y. MANBA	CHECKED N. KITAGAWA	APPROVED Y. FUJII	PART NO. / 型番 04 6817 6XX 000 846 +							
				DWG NO. / 図番 BJS 6817003				SHEET/REV 12/3 K			

KYOCERA

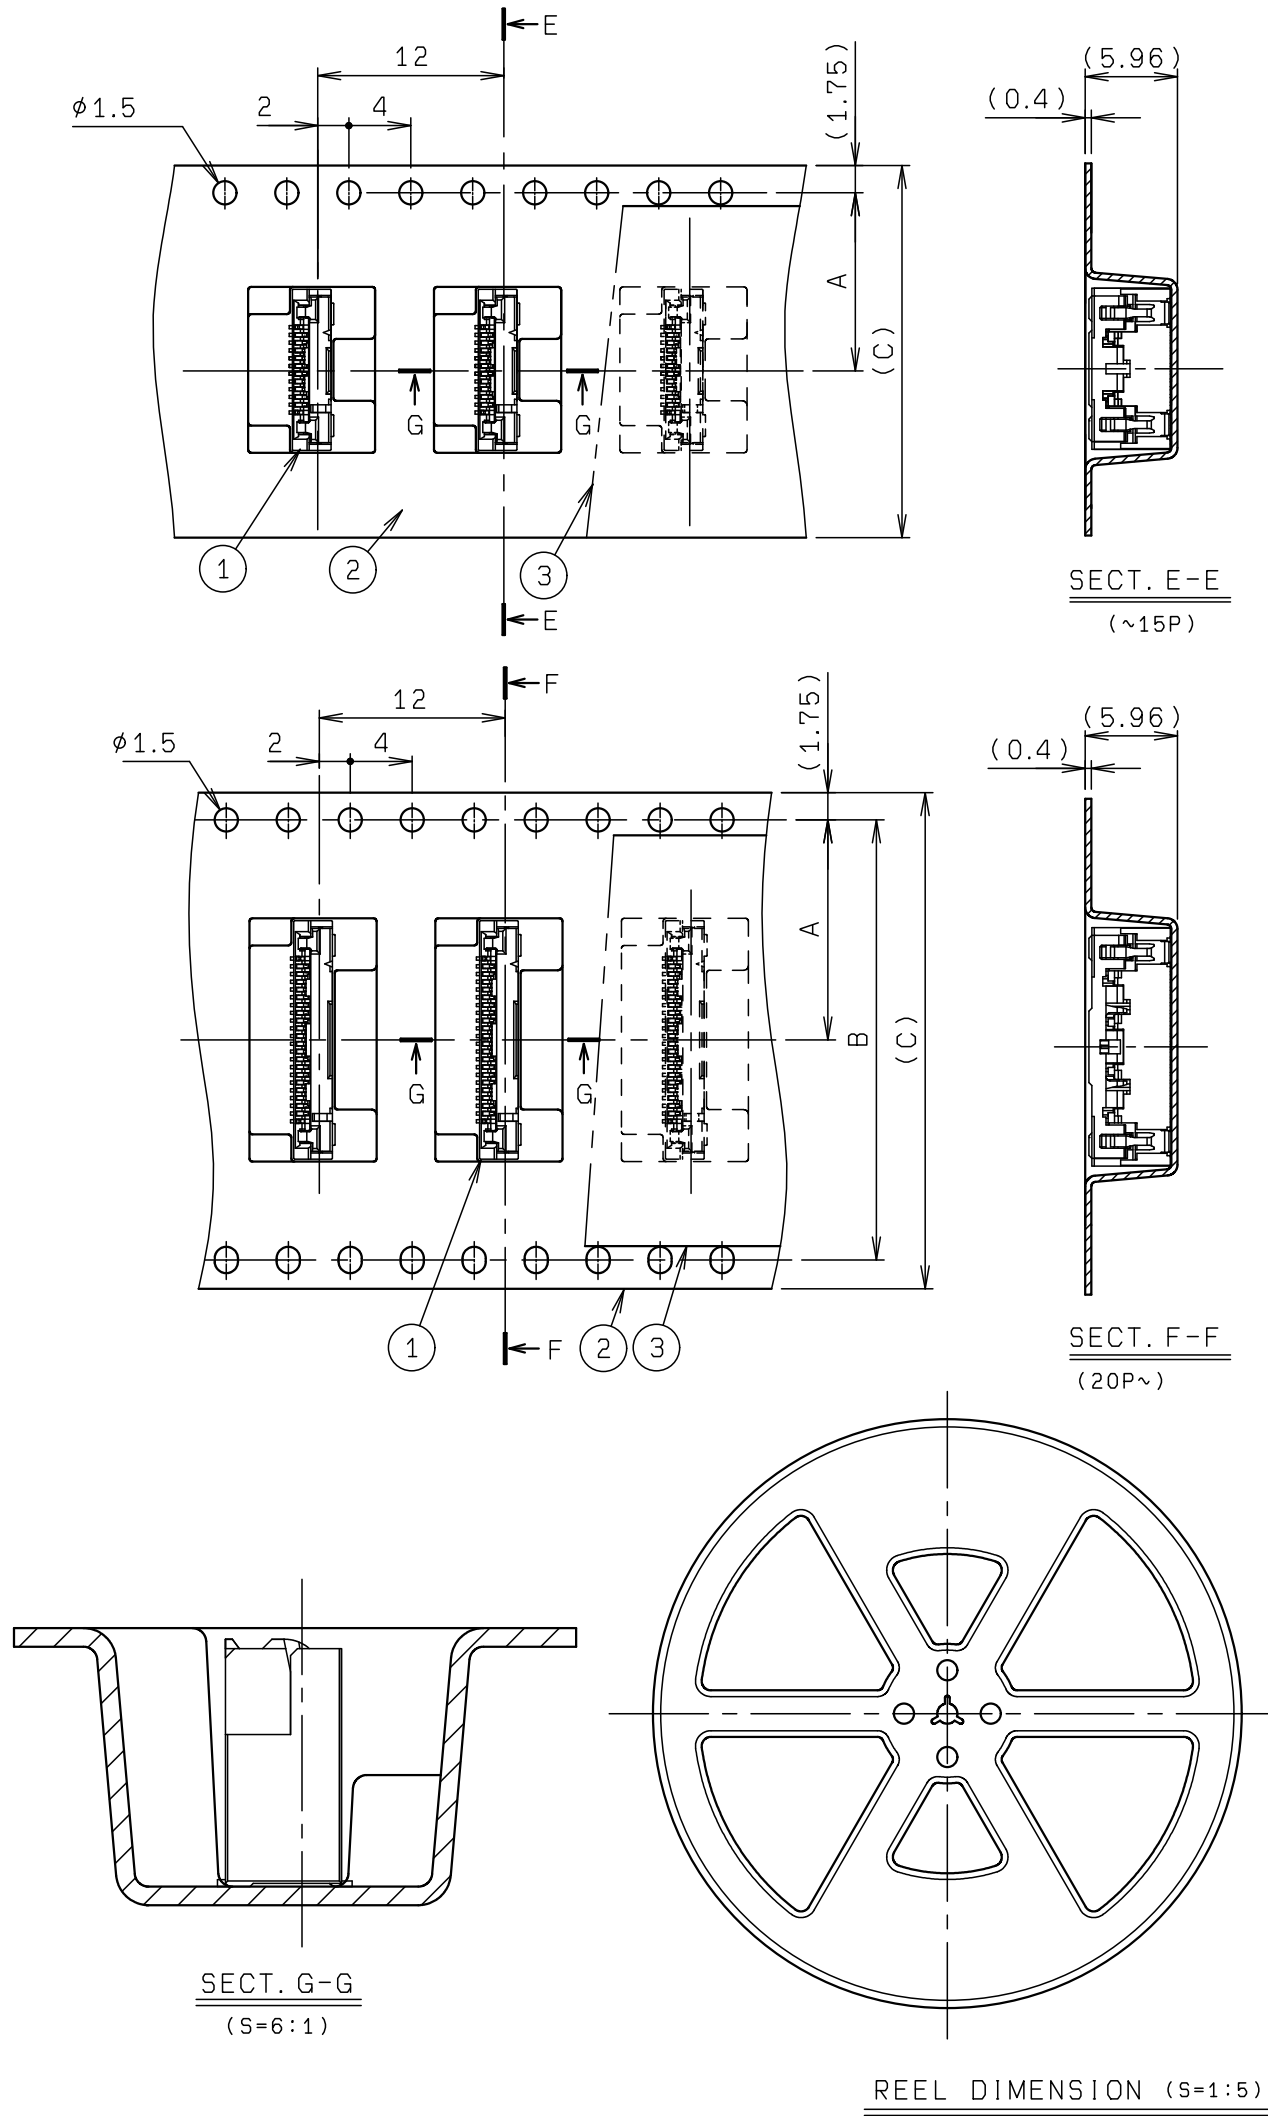

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	CONNECTOR	04 6817 6XX 000 846 +	1200			00 6817 6XX 000 846 +
2	EMBOSSSED TAPE		1	POLYSTYRENE		
3	TOP COVER TAPE		1	POLYSTYRENE		
4	REEL		1	POLYSTYRENE		


極 数 NO. OF POS.	A	B	C	D
10	11.5	----	24.0	30.4
15	11.5	----	24.0	30.4
20	14.2	28.4	32.0	38.4
30	14.2	28.4	32.0	38.4
40	20.2	40.4	44.0	50.4
50	20.2	40.4	44.0	50.4

※この表は3ページ目にのみ適用
※THIS CHART IS APPLICABLE TO SHEET-3 ONLY.


注 記
NOTE

1. 梱包数量 : 1200 個/リール
PACKING QUANTITY : 1200 ea/reel

2. 納入時のリール巻き方向
REELING DIRECTION
IN DELIVERY

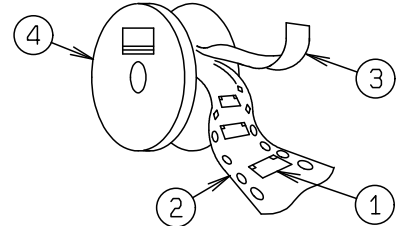

3. 引出し方向
USER DIRECTION OF FEED

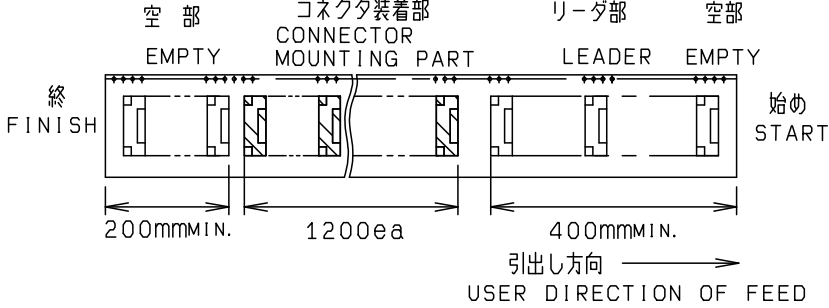

4. 型 番
P/N 04 6817 6XX 000 846 +

極 数
NO. OF POS.
バリエーション
VARIATION
0 : ST TYPE
めっき
PLATING
SIGNAL CONT AU

※この注記の1~3は3ページ目にのみ適用
※THIS NOTES 1 TO 3 ARE APPLICABLE TO SHEET-3 ONLY.

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2		UNIT		ANGLE		REFER TO SHEET		1/3	
10 ≤ X < 30 ±0.25		mm		3RD		NO.		EDN/DCN	
30 ≤ X ±0.3		SCALE		DATE		DATE		ISSUE	
ANGLE / 角度 ±3°		NTS		2018/10/16		PART NAME / 品名		CHECKED	
DRAWN		DESIGNED		CHECKED		APPROVED		PART NO. / 型番	
Y. MANBA		Y. MANBA		N. KITAGAWA		Y. FUJII		04 6817 6XX 000 846 +	
								DWG NO. / 図番	
								BJS 6817003	
								SHEET/REV	
								13/3 K	

KYOCERA