

1. 適用範囲

本仕様書は、6809シリーズ（X1Xタイプ）コネクタ組立製品のエンボステープ梱包に適用する。

2. 対象製品型番 2 / 2 頁参照

3. 梱包副資材 2 / 2 頁参照

4. 梱包方法

(1) エンボステープ梱包

- ①エンボステープポケットへ製品をエンボス Assy's 図に表記された向きに1個ずつ詰め、トップテープを上面にヒートシーリングしてリールに巻き取る。
- ②リール巻き仕様
図のようにエンボステープの巻き始め200mmをダミーとして巻き取り芯に粘着テープで止める。
製品を4,000個実装した後、更に巻き終わり400mm以上のダミー部を設ける。
最後にエンボステープを図の様に粘着テープ止めし、現品票を貼付する。

(2) 外装箱梱包

- ①製品を詰めたリールを外装箱に段重ねに収納する。
- ②上部空間には緩衝材を詰める。
- ③外装箱の封は市販粘着テープで行う。
- ④現品票を側面に貼付する。

現品票記入項目 製品型番
製品ロット番号
数量

1. Scope

These specifications apply to the emboss tape packing of 6809 series (x1x types) connector assembling products.

2. Part number of applicable products (See page 2/2)

3. Packaging material (See page 2/2)

4. Packaging method

(1) Packaging of embossed tape (Fig.1)

- ①Put a connector into the pocket, seal the top tape, and reel it.
- ②Fix the start of the top tape with an adhesive tape.
Let the start of the embossed tape 200mm be no components
Put 4,000pcs.connectors into the pocket.
Let the end of the embossed tape 400mm be no components.
Fix the end of the tape with an adhesive tape as shown in (Fig.2) and stick a slip.

(2) Packaging of outer carton (Fig. 2)

- ①Pack reels with connectors packaged in an outer carton.
- ②Place an air packing on the top reels.
- ③Fix the outer carton with an adhesive tape sold in the market.
- ④Stick a slip on the side face.

☆A slip be filled in the customer's part number, lot number and Q'ty.

REV.	CONTENTS	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
O	INITIAL VERSION	EDN-562	14/10/28	Y,Nakamura	Y,Manba	K,Kawamoto
A	I change a packing form of it	DCN-826	15/07/23	Y,Nakamura	Y,Manba	Y,Hara
B	Add P/N	DCN19C51	19/11/14	S.Morita	Y,Manba	Y.Fujii

2.対象型番 P/N	3.梱包副資材 PACKAGING MATERIAL			4.梱包収納数 Q'ty			
	PACKAGING MATERIAL	P/N	Size	極数 Pos.	リール Reel	箱 小 PAC. S	箱 大 PAC. L
04 6809 6** *10 846 +	Embossed tape of 16/24/32/44mm wide	98 6809 0** 0*1 000	12Pitch	4~13P(16W)	4,000	20,000	44,000
04 6809 6** *11 846 +	Top tape of 16/24/32/44mm wide	95 9300 0018 60 031/032/033/034	t0.06×w13.3/21.3/26.5/38.5mm	14~29P(24W)	4,000	16,000	32,000
	Emboss reel of 16/24/32/44mm wide	95 9300 0018 40 132/133/134/135	φ 380 : w21.5/29.5/37.5/49.5mm	30~39P(32W)	4,000	12,000	24,000
	Outer carton (Small)	95 9300 0018 20 114	385×385×H125	40P(44W)	4,000	8,000	16,000
	Outer carton (Large)	95 9300 0018 20 115	385×385×H250				

Fig 1

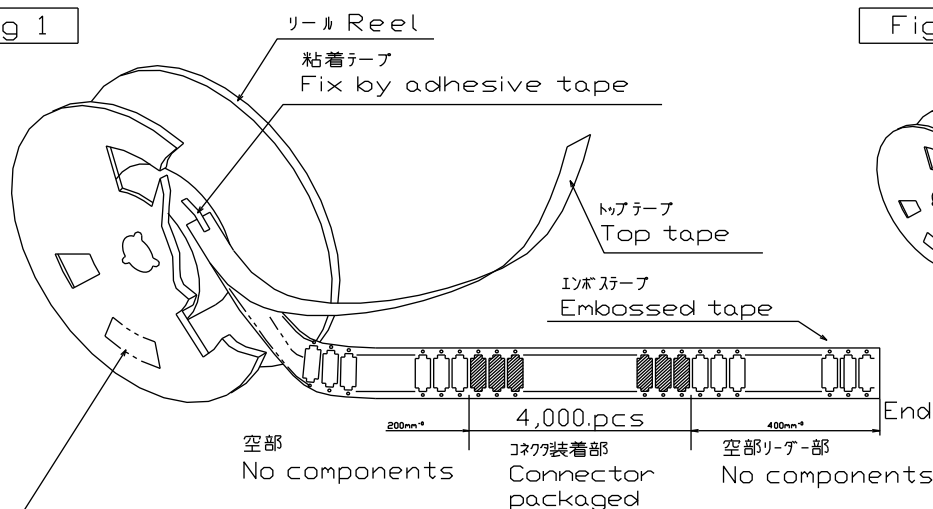


Fig 2





Fig 3

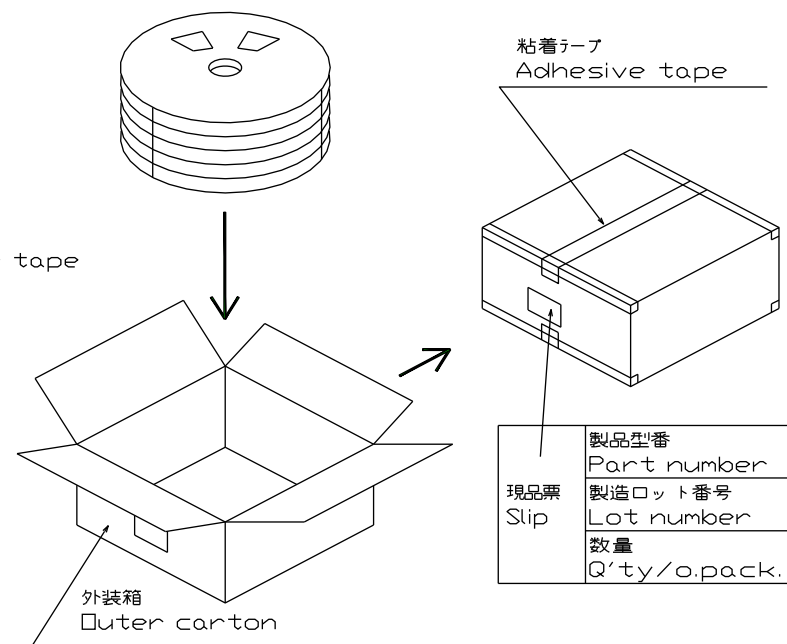

現品票 Slip	製品型番	Part number
	製造ロット番号	Lot number
	数量	Q'ty/reel

04 6809 6XX X1X 846 +

- インボスバリエーション
EMBOSS VARIATION
- 1: インボスピッチ 12mm EMOSS PITCH 12mm
インボステープ幅 16mm EMOSS TAPE WIDTH 16mm
 - 2: インボスピッチ 12mm EMOSS PITCH 12mm
インボステープ幅 24mm EMOSS TAPE WIDTH 24mm
 - 3: インボスピッチ 12mm EMOSS PITCH 12mm
インボステープ幅 32mm EMOSS TAPE WIDTH 32mm
 - 4: インボスピッチ 12mm EMOSS PITCH 12mm
インボステープ幅 44mm EMOSS TAPE WIDTH 44mm

現品票 Slip	製品型番	Part number
	製造ロット番号	Lot number
	数量	Q'ty/o.pack.

305-03-1033