

1. 適用範囲

本仕様書は、8005 / 8015 シリーズ コネクター組立製品のエンボステープ梱包に適用する。

2. 対象製品型番 2 / 2 頁参照

3. 梱包副資材 2 / 2 頁参照

4. 梱包方法

(1) エンボステープ梱包

①エンボステープポケットへ製品をエンボス Assy's 図に表記された向きに1個ずつ詰め、トップテープを上面にヒートシーリングしてリールに巻き取る。

②リール巻き仕様

図のようにエンボステープの巻き始め200mmをダミーとして巻き取り芯に粘着テープで止める。
製品を3,000 / 6,000個実装した後、更に巻き終わり400mm以上のダミー部を設ける。最後にエンボステープを図の様に粘着テープ止めし、現品票を貼付する。

(2) 外装箱梱包

- ①製品を詰めたリールを外装箱に段重ねに収納する。
- ②上部空間には緩衝材を詰める。
- ③外装箱の封は市販粘着テープで行う。
- ④現品票を側面に貼付する。

現品票記入項目 対象型番
ロット番号
数量

1. Scope

This specifies embossed packaging for assembly of connector of series 8005/8015.

2. Part number of applicable products (See page 2/2)

3. Packaging material (See page 2/2)

4. Packaging method

(1) Packaging of embossed tape (Fig.1)

①Put a connector into the pocket, seal the top tape, and reel it.

②Fix the start of the top tape with an adhesive tape.

Let the start of the embossed tape 200mm be no components
Put 3,000/6,000pcs.connectors into the pocket.

Let the end of the embossed tape 400mm be no components.

Fix the end of the tape with an adhesive tape as shown in (Fig.2) and stick a slip.

(2) Packaging of outer carton (Fig. 2)

- ①Pack reels with connectors packaged in an outer carton.
- ②Place an air packing on the top reels.
- ③Fix the outer carton with an adhesive tape sold in the market.
- ④Stick a slip on the side face.

☆A slip shall be filled in the part number, lot number and Q'ty.

REV.	CONTENTS	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
O	INITIAL VERSION	EDN-	95/12/19	Y.SUZUKI	Y.KOSHIMIZU	T.KUBOTA
E	CHANGE TO PART NUMBER	DCN-073	05/01/20	M.SATO	Y.KOSHIMIZU	M.ICHIHARA
F	CHANGE TO PART NUMBER	DCN-496	07/05/28			
G	Specifications change	DCN-897	14/08/30	Y,Nakamura	T,Uehara	N,Hayashi

2.対象型番 P/N	3.梱包副資材 PACKAGING MATERIAL			4.梱包収納数 Q'ty			
	PACKAGING MATERIAL	P/N	Size	極数 Pos.	リール Reel	箱 小 PAC. S	箱 大 PAC. L
24 8005 *02 *0* *** **	Embossed tape of 12mm wide	94 8005 002 *** 000	4Pitch	ST(12W)	6,000	54,000	96,000
24 8015 *02 *0* *** **	Top tape of 12mm wide	95 9300 0018 60 038	T0.06×9.3mm wide	RA(12W)	3,000	27,000	48,000
	Emboss reel of 12mm wide	95 9300 0018 40 121	φ 330 : 17.5mm wide				
	Outer carton (Small)	95 9300 0018 20 052	335mm×335mm×H165				
	Outer carton (Large)	95 9300 0018 20 096	335mm×335mm×H296				

Fig 1


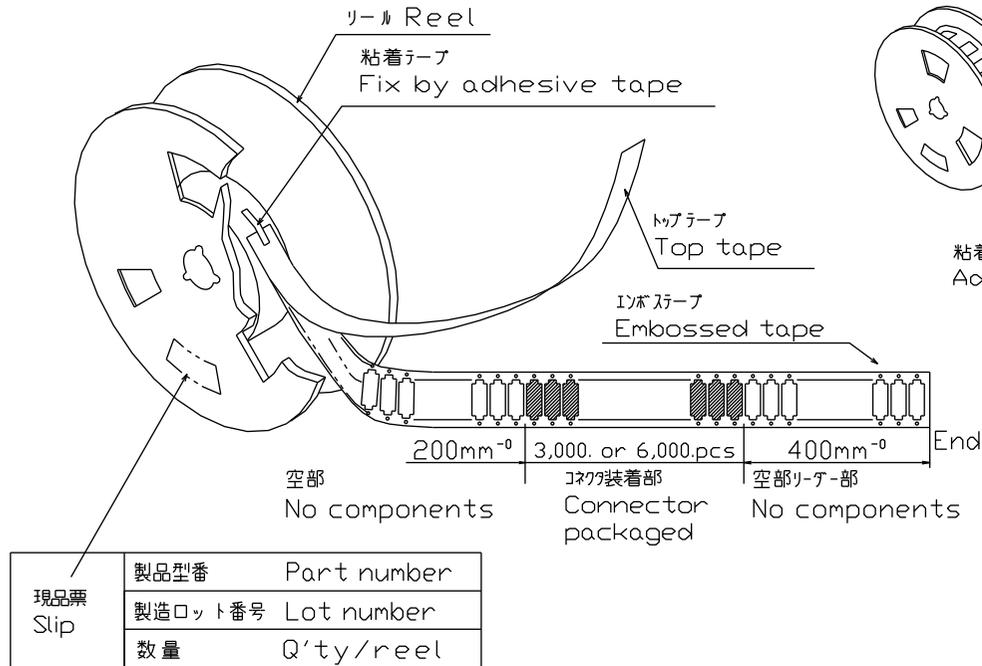


Fig 2



Fig 3

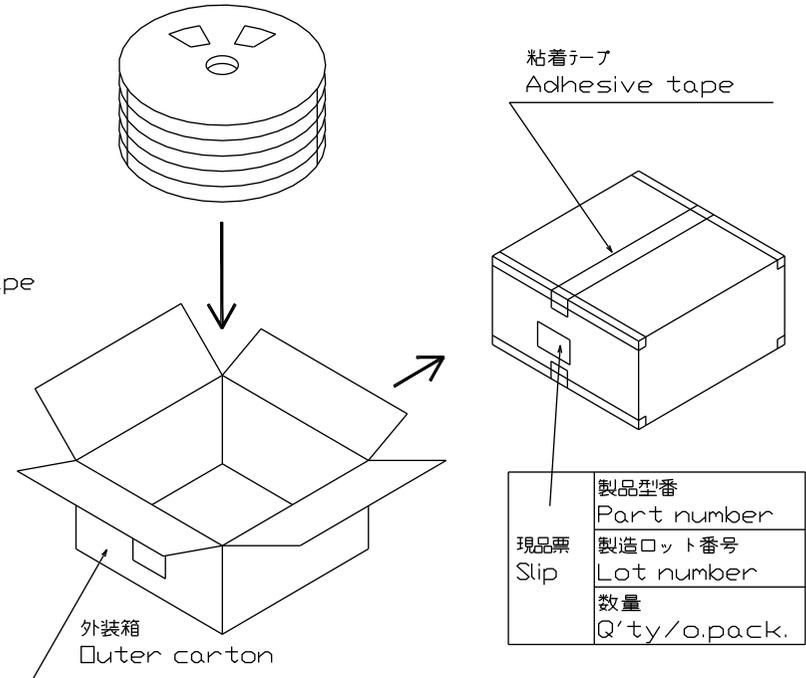

305-03-155