

1. 適用範囲

本仕様書は、5077 シリーズコネクタの組立製品のエンボステープ梱包に適用する。

2. 対象製品型番 2 / 2 頁参照

3. 梱包副資材 2 / 2 頁参照

4. 梱包方法

(1) エンボステープ梱包

- ①エンボステープポケットへ製品を1個ずつ詰め、トップテープを上面にヒートシーリングしてリールに巻き取る。
- ②図のようにエンボステープの巻き始め 200mm をダミーとして巻き取り芯に粘着テープで止める。
製品を 500 又は 250 個実装した後、更に巻き終わり 400mm 以上のダミー部を設ける。
最後にエンボステープを図の様に粘着テープ止めし、現品票を貼付する。
- ③トップテープは製造メーカーより入庫後冷暗場所で保管し、6ヶ月以内に使用すること。6ヶ月経過したものは廃棄処分する。

(2) 外装箱梱包

- ①製品を詰めたリールを外装箱に段重ねに収納する。
- ②製品が動かないように緩衝材を詰める。
- ③外装箱の封は市販粘着テープで行う。
- ④現品票を側面に貼付する。

現品票は京セラ指定のバーコード表示を原則とする。

〈現品票記入項目〉

製品型番、製品ロット番号、数量

1. Scope

This specifies embossed packaging for assembly of connector of series 5077.

2. Part number of applicable products (See page 2/2)

3. Packaging material (See page 2/2)

4. Packaging method

(1) Packaging of embossed tape (Fig.1)

- ①Put a connector into the pocket, seal the top tape, and reel it.
- ②Fix the start of the top tape with an adhesive tape.
Let the start of the embossed tape 200mm be no components
Put 500 or 250pcs.connectors into the pocket.
Let the end of the embossed tape 400mm be no components.
Fix the end of the tape with an adhesive tape as shown in and stick a slip.
- ③Top tape shall be preserved at cool and dark place and shall be used with in 6 month after incoming from a manufacture.

(2) Packaging of outer carton (Fig. 2)

- ① Reels with connectors packaged shall be packed in an outer package.
- ② Place an air packing to prevent connectors from moving.
- ③ Fix the outer carton with an adhesive tape sold in the market.
- ④ Stick a slip on the side face.

Bar code form of KYOCERA Corporation is standard.

A slip be filled in the part number, lot number and Q'ty.

REV.	CONTENTS	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
O	INITIAL VERSION	EDN-	96/01/17	Y.SUZUKI	Y.KOSHIMIZU	T.KUBOTA
D	CHANGE OF PARTS NUMBER	DCN-	04/10/26			

梱包仕様 PACKING SPECIFICATION		Series 5 0 7 7 ASSEMBLY OF EMBOSSED TAPE		NO. 305-03-159		REV D	(2/2)
2.対象型番 P/N	3.梱包副資材 PACKAGING MATERIAL	P/N	Size	Q'ty Pos.	リール Reel	箱 小 PAC. S	箱 大 PAC. L
14 5077 *** 1** *** **	Embossed tape of 56mm wide	98 5077 *** 00* 000	12Pitch	56W(12Pitch)	500	1,000	2,000
24 5077 *** 1** *** **	Embossed tape of 56mm wide	98 5077 050 008 000	16Pitch	56W(16Pitch)	250	500	1,000
	Top tape of 56mm wide	95 9300 0018 60 015	T0.06×50.5mm wide				
	Emboss reel of 56mm wide	95 9300 0018 40 126	φ 330 : 57.5mm wide				
	Outer package small	95 9300 0018 20 052	335×335×H165				
	Outer package large	95 9300 0018 20 096	335×335×H296				

Fig 1

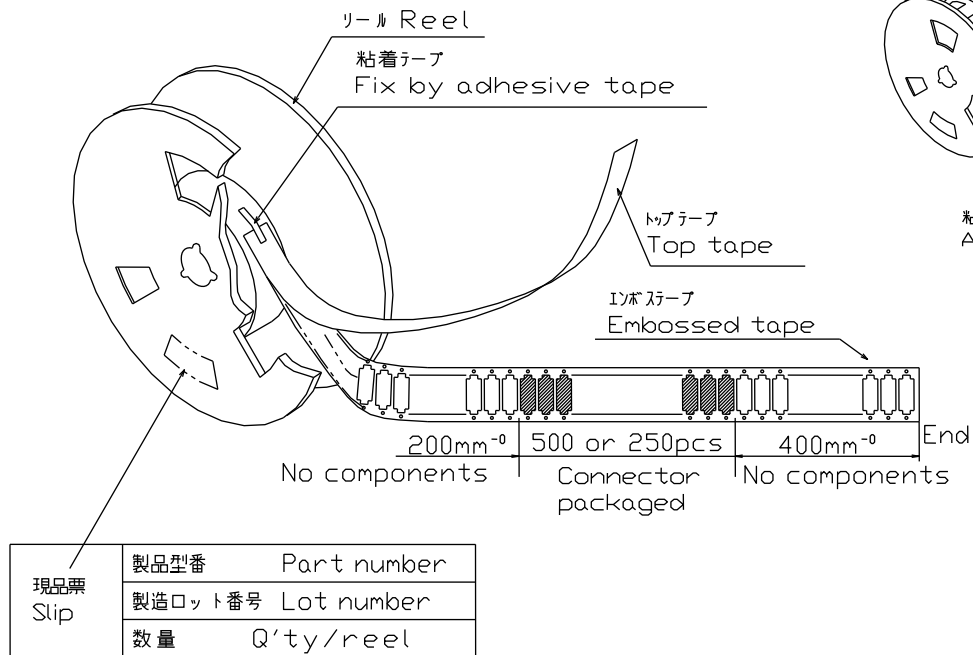


Fig 2

