

1. 適用範囲

本仕様書は、5 0 4 6 シリーズ コネクターの組立製品のエンボステープ梱包に適用する。

2. 対象製品型番 2 / 2 頁参照

3. 梱包副資材 2 / 2 頁参照

4. 梱包方法

(1) エンボステープ梱包

- ①エンボステープポケットへ製品を図の向きに1個ずつ詰め、トップテープを上面にヒートシーリングしてリールに巻き取る。
- ②リール巻き仕様
図のようにエンボステープの巻き始め200mmをダミーとして巻き取り芯に粘着テープで止める。
製品を1,000個実装した後、更に巻き終わり400mm以上のダミー部を設ける。
最後にエンボステープを図の様に粘着テープ止めし、現品票を貼付する。

(2) 外装箱梱包

- ①製品を詰めたリールを外装箱に段重ねに収納する。
- ②図の様に空間は緩衝材を充填すること。
- ③外装箱の封は市販粘着テープで行う。
- ④現品票を側面に貼付する。

現品票は京セラ指定のバーコード表示を原則とする。

〈現品票記入項目〉

製品型番、製品ロット番号、数量

1. Scope

This specifies embossed packaging for assembly of connector of series 5046.

2. Part number of applicable products (See page 2/2)

3. Packaging material (See page 2/2)

4. Packaging method

(1) Packaging of embossed tape (Fig.1)

- ①Put a connector into the pocket, seal the top tape, and reel it.
- ②Fix the start of the top tape with an adhesive tape.
Let the start of the embossed tape 200mm be no components
Put 1,000pcs.connectors into the pocket.
Let the end of the embossed tape 400mm be no components.
Fix the end of the tape with an adhesive tape as shown in (Fig.2) and stick a slip.

(2) Packaging of outer carton (Fig. 2)

- ①Pack reels with connectors packaged in it.
- ②Place an air packing replete on the top reels.
- ③Fix the outer carton with an adhesive tape sold in the market.
- ④Stick a slip on the side face.

Bar code form of KYOCERA Corporation is standard.

A slip be filled in the customer's part number, lot number and Q'ty.

REV.	CONTENTS	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
O	INITIAL VERSION	EDN-830	97/12/17	K.OKUBO	Y.KOSHIMIZU	T.KUBOTA
H	CHANGE OF PARTS NUMBER	DCN-1346	04/09/30			

梱包仕様 PACKING SPECIFICATION		Series 5 0 4 6 ASSEMBLY OF EMBOSSED TAPE		NO. 305-03-269		REV H	(2/2)
2.対象型番 P/N	3.梱包副資材 PACKAGING MATERIAL	P/N	Size	Q'ty Pos.	リール Reel	箱 小 PAC. S	箱 大 PAC. L
14 5046 *** *3* 8** *	Embossed tape of 32/44/56mm wide	98 5046 *** *35/*45 000	12Pitch	20~60P (32W)	1,000	4,000	7,000
14 5046 *** *4* 8** *	Top tape of 32/44/56mm wide	95 9300 0018 60 013~5	T0.06×26.5/38.5/50.5mm wide	70~100P(44W)	1,000	3,000	5,000
24 5046 *** *00 8** *	Emboss reel of 32/44/56mm wide	95 9300 0018 40 124~6	φ 330 : 33.5/45.5/57.5mm wide	110,120P (56W)	1,000	2,000	4,000
	Outer carton (Small)	95 9300 0018 20 052	335mm×335mm×H165mm				
	Outer carton (Large)	95 9300 0018 20 096	335mm×335mm×H296mm				

Fig 1

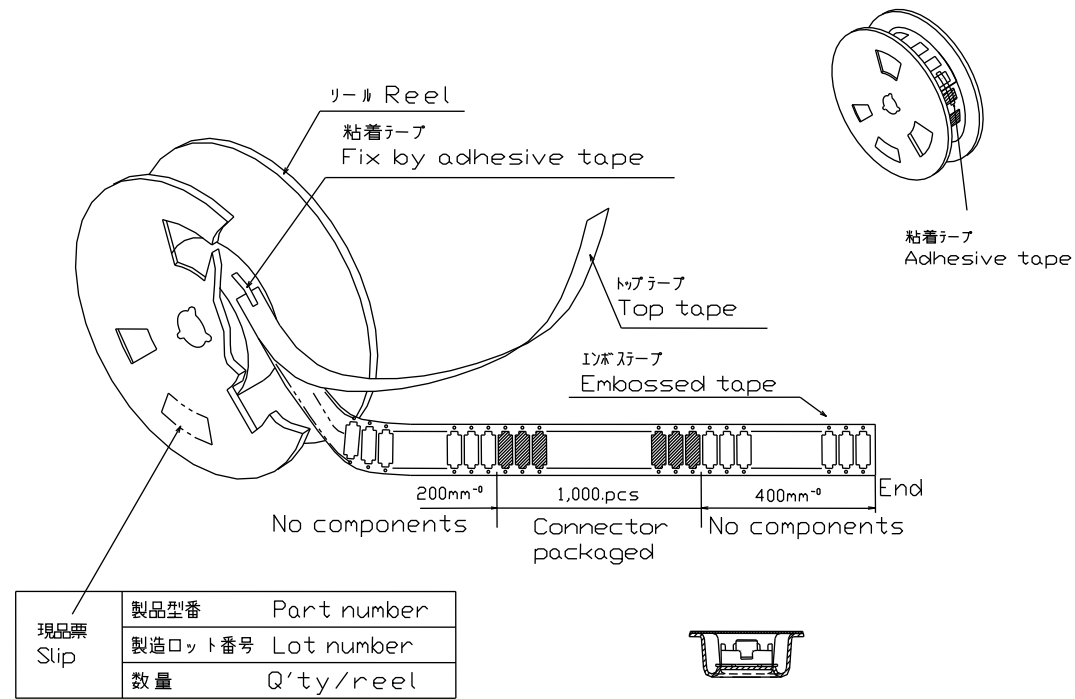


Fig 2

