

## 1. 適用範囲

本仕様書は、6 2 5 1 シリーズ 0.5 mm ピッチ FPC コネクタの組立製品のエンボステープ梱包に適用する。

## 2. 対象製品型番 2 / 2 頁参照

## 3. 梱包副資材 2 / 2 頁参照

## 4. 梱包方法

## (1) エンボステープ梱包

- ①エンボステープポケットへ製品をエンボス Assy's 図に表記された向きに1個ずつ詰め、トップテープを上面にヒートシーリングしてリールに巻き取る。
- ②リール巻き仕様  
図のようにエンボステープの巻き始め200mmをダミーとして巻き取り芯に粘着テープで止める。  
製品を1,000個実装した後、更に巻き終わり400mm以上のダミー部を設ける。  
最後にエンボステープを図の様に粘着テープ止めし、現品票を貼付する。

## (2) 外装箱梱包

- ①製品を詰めたリールを外装箱に段重ねに収納する。  
②上部空間には緩衝材を詰める。  
③外装箱の封は市販粘着テープで行う。  
④現品票を側面に貼付する。

## 1. Scope

These specifies embossed for assembly of 0.5mm pitch FPC connector of series 6251.

## 2. Part number of applicable products (See page 2/2)

## 3. Packaging material (See page 2/2)

## 4. Packaging method

## (1) Packaging of embossed tape (Fig.1)


- ①Put a connector into the pocket, seal the top tape, and reel it.
- ②Fix the start of the top tape with an adhesive tape.  
Let the start of the embossed tape 200mm be no components  
Put 1,000pcs.connectors into the pocket.  
Let the end of the embossed tape 400mm be no components.  
Fix the end of the tape with an adhesive tape as shown in (Fig.2) and stick a slip.

## (2) Packaging of outer carton (Fig. 2)

- ①Pack reels with connectors packaged in an outer carton.  
②Place an air packing on the top reels.  
③Fix the outer carton with an adhesive tape sold in the market.  
④Stick a slip on the side face.

REV.	CONTENTS	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
O	INITIAL VERSION	EDN-295	2010/06/21	H.Matsuda		Y.Kawamura
D	ADD TO PLATING CODE	DCN-496	2016/06/06	R.Manabe	N.Kitagawa	Y.Fujii
E	ADD TO PART NUMBER	DCN 19305	2019/05/13	R.Manabe	N.Kitagawa	Y.Fujii
F	ADD TO POSITION NUMBER	DCN 19321	2019/05/15	R.Manabe	N.Kitagawa	Y.Fujii

2.対象型番 P/N	3.梱包副資材 PACKAGING MATERIAL			4.梱包収納数 Q'ty			
	PACKAGING MATERIAL	P/N	Size	極数 Pos.	リール Reel	箱 小 PAC. S	箱 大 PAC. L
04 6251 0** 010 *** *	Embossed tape of 24/32/44/56mm wide	98 6251 0** 001 000	12Pitch	10,16P (24W)	1,000	4,000	8,000
04 6251 0** 020 *** *	Top tape of 24/32mm wide	95 9300 0018 60 012/013	T0.06×21.3/26.5mm wide	30~33P (32W)	1,000	3,000	6,000
	Top tape of 44/56mm wide	95 9300 0018 60 014/015	T0.06×38.5/50.5mm wide	36~50P (44W)	1,000	2,000	5,000
	Emboss reel of 16/24mm wide	95 9300 0018 40 133/134	φ 380 : 25.5/33.5mm wide	60~64P (56W)	1,000	2,000	4,000
	Emboss reel of 32/44mm wide	95 9300 0018 40 135/136	φ 380 : 45.5/57.5mm wide				
	Outer carton (Small)	95 9300 0018 20 114	385mm×385mm×H125mm				
	Outer carton (Large)	95 9300 0018 20 115	385mm×385mm×H250mm				

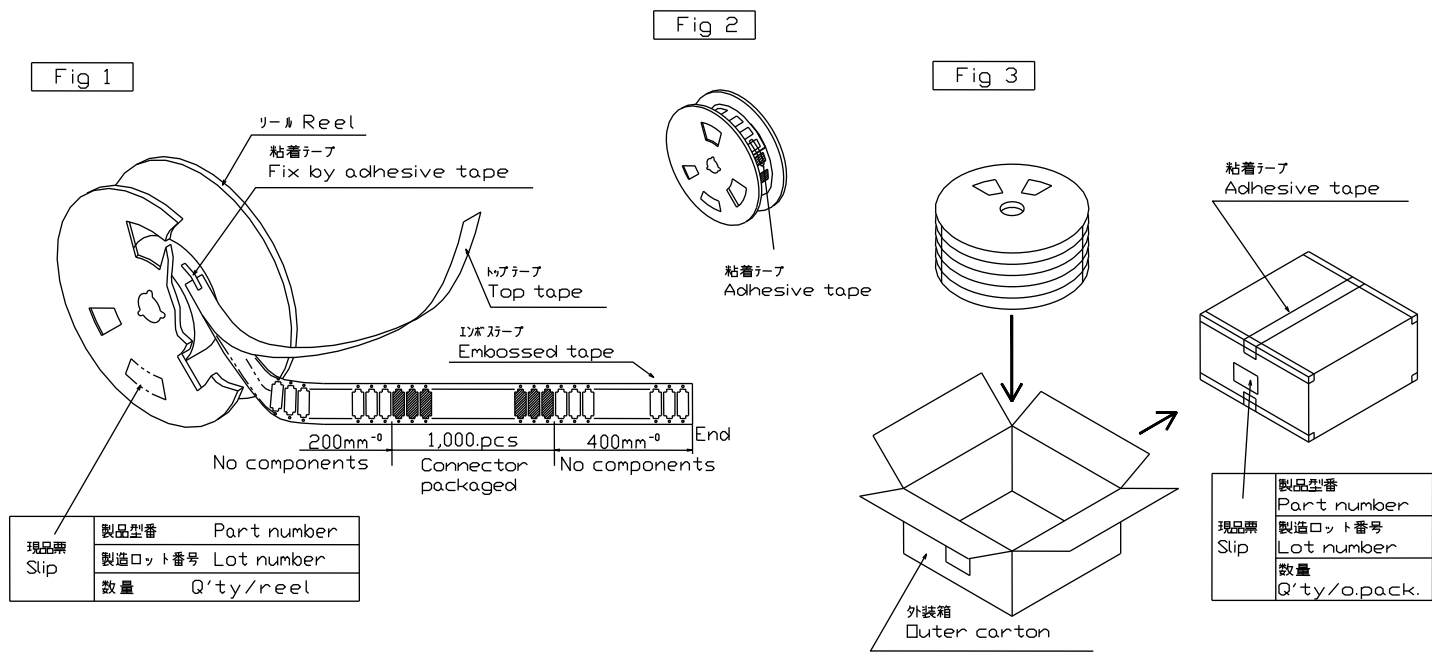

305-03-860